

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/005271

International filing date: 18 February 2005 (18.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/563,874
Filing date: 19 April 2004 (19.04.2004)

Date of receipt at the International Bureau: 23 March 2005 (23.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1295851

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

March 14, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/563,874

FILING DATE: April 19, 2004

RELATED PCT APPLICATION NUMBER: PCT/US05/05271



Certified by

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

16310 U.S. PTO
041904

PROVISIONAL PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No: 20004/234US-PROV-2

PROVISIONAL PATENT APPLICATION TRANSMITTAL

13441 U.S. PTO
60/563874
041904

Mail Stop Provisional Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Transmitted herewith for filing is the provisional patent application under 37 CFR 1.53(c) of

Inventors: **Feininger et al.**

Residence: Florida

Title: **"Server- Based Methods and Apparatus to Determine Audience Viewing of Video-On-Demand Programs"**


1. Application Papers Enclosed

- 1 Title Page
- 40 Pages of Specification
(excluding Claims, Abstract, Sequence Listing & Drawings)
- 0 Page(s) of Claims
- 1 Page of Abstract
- 15 Sheets of Drawings (Figs. 1 to 9)

☐ Formal
☒ Informal

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this Provisional Patent Application Transmittal and the documents referred to as enclosed therewith are being deposited with the United States Postal Service on **April 19, 2004** in an envelope addressed to Mail Stop Provisional Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 utilizing the "Express Mail Post Office to Addressee" service of the United States Postal Service under Mailing Label No. EV 403728672-US.



Mary Michelini

2. Small Entity Status

- ☐ Applicant claims small entity status. See 37 CFR 1.27.
☐ A small entity statement is(are) attached.

3. Additional Papers Enclosed

- ☐ Declaration of Biological Deposit
☐ Computer readable copy of sequence listing containing nucleotide and/or amino acid sequence
☐ Microfiche computer program
☐ Associate power of attorney
☐ Verified translation of a non-English patent application
☐ An assignment of the invention
☒ Return Receipt Postcard
☐ Other (e.g. declaration or oath)

4. Filing Fee Calculation (37 CFR 1.16)

- ☒ Provisional Application (\$80.00/\$160.00) Filing Fee: \$160.00
☐ Other Fees (e.g. Recording Assignment) Filing Fee:

Total Fees Enclosed: **\$160.00**

5. Method of Payment of Fees

- ☒ Enclosed is our firm check in the amount of: \$160.00
☐ Charge Deposit Account No. 50-2455 in the amount of: \$_____
A copy of this Transmittal is enclosed.

6. Deposit Account and Refund Authorization

The Commissioner is hereby authorized to charge any deficiency in the amount enclosed or any additional fees which may be required during the pendency of this application under 37 CFR 1.16 or 37 CFR 1.17 or under other applicable rules (except payment of issue fees), to Deposit Account No. 50-2455. A copy of this Transmittal is enclosed.


Please refund any overpayment to Grossman & Flight, LLC at the address below.

7. Correspondence Address

Respectfully submitted,

GROSSMAN & FLIGHT, LLC
20 North Wacker Drive
Suite 4220
Chicago, Illinois 60606
(312) 580-1020

By:



Mark G. Hanley
Registration No.: 44,736

April 19, 2004

Joint Inventors
20004/234US-PROV-2

"EXPRESS MAIL" mailing label No. EV 403728672 US.
Date of Deposit: April 19, 2004

I hereby certify that this paper (or fee) is being deposited
with the United States Postal Service "EXPRESS MAIL
POST OFFICE TO ADDRESSEE" service under 37 CFR
§1.10 on the date indicated above and is addressed to: Mail
Stop Provisional Patent Application, Commissioner for
Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450


Mary Michelin

PROVISIONAL APPLICATION FOR UNITED STATES LETTERS PATENT

S P E C I F I C A T I O N

TO ALL WHOM IT MAY CONCERN:

Be it known that I, William A. FEININGER, a citizen of the United States of
America, residing at 1656 Allens Ridge Drive N., Palm Harbor 34683, in the State of
Florida have invented new and useful **SERVER-BASED METHODS AND
APPARATUS TO DETERMINE AUDIENCE VIEWING OF VIDEO-ON-DEMAND
PROGRAMS**, of which the following is a specification. My legal representative for this
provisional patent application is Mark G. Hanley (Reg. No. 44,736) of Grossman &
Flight, 20 N. Wacker Drive Suite 4220, Chicago, IL 60606; phone 312.580.1020.

SERVER BASED METHODS AND APPARATUS TO DETERMINE AUDIENCE VIEWING OF VIDEO-ON- DEMAND PROGRAMS

FIELD OF THE DISCLOSURE

[0001] This disclosure relates generally to audience measurement and, more particularly, to server based methods and apparatus to determine audience viewing of video-on-demand programs.

BACKGROUND

[0002] Television ratings and metering information is typically generated by collecting viewing records and/or other viewing information from a group of statistically selected households. Each of the statistically selected households typically has a data logging and processing unit commonly referred to as a "home unit." In households having multiple viewing sites (e.g., multiple television systems), the data logging and processing functionality may be distributed among a single home unit and multiple "site units," one site unit for each viewing site. The home unit (or the combination of the home unit and the site unit) is often in communication with a variety of attachments that provide inputs to the home unit or receive outputs from the home unit. For example, a source identification unit such as a frequency detector attachment may be in communication with a television to sense a local oscillator frequency of the television tuner. In this manner, the frequency detector attachment may be used to determine the channel to which the television is currently tuned based on a detected frequency. Additional

source identification devices, such as on-screen readers and light-emitting-diode (LED) display readers, may be provided, for example, to determine if the television is operating (i.e., is turned ON) and/or the channel to which the television is tuned. A people counter may be located in the viewing space of the television and in communication with the home unit, thereby enabling the home unit to detect the identities and/or number of the persons currently viewing programs displayed on the television.

[0003] The home unit usually processes the inputs (e.g., channel tuning information, viewer identities, etc.) from the attachments to produce viewing records. Viewing records may be generated on a periodic basis (e.g., at fixed time intervals) or may be generated in response to one or more predetermined events, such as a full memory, or a change in an input, such as a change in the identities of the persons viewing the television, a change in the channel tuning information (i.e., a channel change), etc. Each viewing record typically contains channel information, such as a channel number and/or station identification (ID), and a time (e.g., a date and time-of-day) at which the channel was displayed. In cases in which the program content being displayed is associated with a local audio/video content delivery device, such as a digital video disk (DVD) player, a digital video recorder (DVR), a video cassette recorder (VCR), etc., the viewing records may include content identification (i.e., program identification) information as well as information relating to the time and manner in which the associated content was displayed. Viewing records may also contain additional information, such as the number of viewers present at the viewing time.

[0004] The home unit typically collects a quantity of viewing records and periodically (e.g., daily) transmits the collected viewing records to a central office or data processing facility for further processing or analysis. The central data processing facility receives viewing records from home units located in some or all of the statistically selected households and analyzes the viewing records to ascertain the viewing behaviors of households in a geographic area or market of interest, a particular household and/or a particular group of households selected from all participating households. Additionally, the central data processing facility may generate metering statistics and other parameters indicative of viewing behavior associated with some or all of the participating households. This data may be extrapolated to reflect the viewing behaviors of markets and/or regions modeled by the statistically selected households.

[0005] To generate viewing behavior information from viewing records, the central office or data processing facility may compare reference data, such as a list of programs (e.g., a schedule of television programming or a television guide), to the viewing records. In this manner, the central office can infer which program was displayed by cross-referencing the time and channel information in a viewing record to the program associated with that same time and channel in the program schedule. Such a cross-referencing process can be carried out for each of the viewing records received by the central office, thereby enabling the central office to reconstruct which programs were displayed by the selected households and the times at which the programs were displayed. Of course, the aforementioned cross-

referencing process is unnecessary in systems in which the identity of the program is obtained by the home unit and contained in the viewing record.

[0006] The rapid development and deployment of a wide variety of audio/video content delivery and distribution platforms has dramatically complicated the home unit task of providing viewing records or information to the central data collection facility. For instance, while the above-mentioned frequency detector device can be used to detect channel information at a site where network television broadcasts are being displayed (because, under normal operation conditions, the local oscillator frequency corresponds to a known network channel), such a device typically cannot be used with digital broadcast systems. In particular, digital broadcast systems (e.g., satellite-based digital television systems, digital cable systems, etc.) typically include a digital receiver or set-top box at each subscriber site. The digital receiver or set-top box demodulates a multi-program data stream, parses the multi-program data stream into individual audio and/or video data packets, and selectively processes those data packets to generate an audio/video signal for a desired program. The audio and/or video output signals generated by the set-top box can be directly coupled to an audio/video input of an output device (e.g., a television, a video monitor, etc.) As a result, the local oscillator frequency of the output device tuner, if any, does not necessarily identify the channel or program currently being displayed.

[0007] To allow generation of meaningful viewing records in cases wherein, for example, the network channel is not readily identifiable or may not uniquely correspond to a displayed program, metering techniques based on

the use of ancillary codes and/or content signatures may be employed.

Metering techniques that rely on ancillary codes often encode and embed identifying information (e.g., a broadcast/network channel number, a program identification code, a broadcast time stamp, a source identifier to identify a network and/or station providing and/or broadcasting the content, etc.) in the broadcast signal such that the code is not noticed by the viewer. For example, a well-known technique used in television broadcasting involves embedding the ancillary codes in the non-viewable vertical blanking interval of the video signal. Another example involves embedding the ancillary codes in non-audible portions of the audio signal accompanying the broadcast program. This latter technique is especially advantageous because the ancillary code may be reproduced by, for example, the television speaker and non-intrusively monitored by an external sensor, such as a microphone.

[0008] In general, signature-based program identification techniques use one or more characteristics of the currently displayed (but not yet identified) audio/video content to generate a substantially unique proxy or signature (e.g., a series of digital values, a waveform, etc.) for that content. The signature information for the content being displayed may be compared to a set of reference signatures corresponding to a known set of programs. When a substantial match is found, the currently displayed program content can be identified with a relatively high probability.

[0009] While the known apparatus and techniques described above are well-suited for generating viewing records associated with live viewing of broadcast television programming, they may not be directly applicable to the

generation of viewing records associated with video-on-demand (VOD) programs. In a VOD system, a subscriber may select among a potentially large collection of programming content to be transmitted to the specific subscriber's home for immediate viewing or for viewing at a later time. Thus, existing metering techniques based on cross-referencing a predetermined broadcast programming guide or television listing are not applicable because the content to be transmitted to the subscriber's home is not known prior to when the subscriber makes the selection. Thus, existing techniques would require a computationally expensive brute-force search over all possible reference broadcast and VOD content to determine the specific VOD content being consumed at the subscriber's home (because existing metering techniques typically do not distinguish whether the source of the consumed programming content is a broadcast or a VOD source). Moreover, the existing metering techniques may not be able to distinguish between content that may be provided by both a broadcast provider and a VOD provider and, as such, may incorrectly credit the source of the consumed programming content.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a block diagram of an example local metering system coupled to an example home entertainment system.

[0011] FIG. 2 is a block diagram of an example broadcast system and an example monitoring system.

[0012] FIG. 3 is a block diagram of an example monitoring system for video-on-demand (VOD) programming that may employ metered data from a VOD server and/or a statistically selected home.

[0013] FIG. 4 illustrates an example viewing record generated by the local metering system of FIG. 1.

[0014] FIG. 5 is a flowchart of a first example process to monitor VOD programming that may employ metered data from a VOD server and a statistically selected home.

[0015] FIG. 6 is a flowchart of a second example process to monitor VOD programming that may employ metered data from a VOD server and a statistically selected home.

[0016] FIGS. 7A-7C are a flowchart representative of example machine readable instructions which may be executed by a machine to generate VOD metering data based on information from the VOD server of FIG. 3.

[0017] FIGS. 8A-8G illustrate example VOD server information packets that may be generated by the example program represented by the flowchart of FIGS. 7A-7C.

[0018] FIG. 9 is a block diagram of an example computer that may be used to implement the example program represented by the flowchart of FIGS. 7A-7C.

DETAILED DESCRIPTION

[0019] A block diagram of an example local metering system 100 capable of providing viewing and metering information for video-on-demand program content via an example home entertainment system 102 is illustrated in FIG. 1. The example home entertainment system 102 includes a broadcast source 104, a set-top box (STB) 108, a signal splitter 116 and a television 120. The example local metering system 100 includes a home unit 124. The components of the home entertainment system 102 and the local metering system 100 may be connected in any well-known manner including that shown in FIG. 1. For example, in a statistically selected household having one or more home entertainment systems 102, the home unit 124 may be implemented as a single home unit and one or more site units. In such a configuration, the single home unit performs the functions of storing data and forwarding the stored data to a central facility (such as the central facility 211 of FIG. 2 discussed below) for subsequent processing. Each site unit is coupled to a corresponding home entertainment system 102 and performs the functions of collecting viewing/metering data, processing such data (possibly in real-time) and sending the processed data to the single home unit for that home. The home unit receives and stores the data collected by the site units and subsequently forwards that collected data to the central facility.

[0020] The broadcast source 104 may be any broadcast media source, such as a cable television service provider, a satellite television service provider, a radio frequency (RF) television service provider, an internet streaming video/audio provider, etc. The broadcast source 104 may provide

analog and/or digital television signals to the home entertainment system 102, for example, over a coaxial cable or via a wireless connection.

[0021] The STB 108 may be any set-top box, such as a cable television converter, a direct broadcast satellite (DBS) decoder, a video cassette recorder (VCR), etc. The set-top box 108 receives a plurality of broadcast channels from the broadcast source 104. Typically, the STB 108 selects one of the plurality of broadcast channels based on a user input, and outputs one or more signals received via the selected broadcast channel. In the case of an analog signal, the STB 108 tunes to a particular channel to obtain programming delivered on that channel. For a digital signal, the STB 108 may tune to a channel and decode certain packets of data to obtain programming delivered on a selected channel. For example, the STB 108 may tune to a major channel and then extract a program carried on a minor channel within the major channel via the decoding process mentioned above. For some home entertainment systems 102, for example, those in which the broadcast source 104 is a standard RF analog television service provider or a basic analog cable television service provider, the STB 108 may not be present as its function is performed by a tuner in the television 120.

[0022] An output from the STB 108 is fed to a signal splitter 116, such as a single analog y-splitter in the case of an RF coaxial connection between the STB 108 and the television 120 or an audio/video splitter in the case of a direct audio/video connection between the STB 108 and the television 120. (For configurations in which the STB 108 is not present, the broadcast source 104 may be coupled directly to the signal splitter 116). In the example home

entertainment system 102, the signal splitter produces two signals indicative of the output from the STB 108. Of course, a person of ordinary skill in the art will readily appreciate that any number of signals may be produced by the signal splitter 116.

[0023] The STB 108 may also be coupled to a back-channel connection 128 to provide a return communication path to the broadcast signal provider corresponding to the broadcast source 104. The STB 108 may use the back-channel connection 128 to send billing and/or status information to the broadcast provider. The back-channel connection 128 may also allow a subscriber to use the STB 108 to request/order content for viewing on the television 120 (e.g., pay-per-view movies, video-on-demand programming, etc.), purchase goods and/or services, modify the subscription package associated with the STB 108, etc.

[0024] In the illustrated example, one of the two signals from the signal splitter 116 is fed to the television 120 and the other signal is delivered to the home unit 124. The television 120 may be any type of television or television display device. For example, the television 120 may be a television and/or display device that supports the National Television Standards Committee (NTSC) standard, the Phase Alternating Line (PAL) standard, the Système Électronique pour Couleur avec Mémoire (SECAM) standard, a standard developed by the Advanced Television Systems Committee (ATSC), such as high definition television (HDTV), a standard developed by the Digital Video Broadcasting (DVB) Project, or may be a multimedia computer system, etc.

[0025] The second of the two signals from the signal splitter 116 (i.e., the signal carried by connection 136 in FIG. 1) is coupled to an input of the home unit 124. The home unit 124 is a data logging and processing unit that may be used to generate viewing records and other viewing information useful for determining viewing and other metering information. The home unit 124 typically collects a set of viewing records and transmits the collected viewing records over a connection 140 to a central office or data processing facility (not shown) for further processing or analysis. The connection 140 may be a telephone line, a return cable television connection, an RF or satellite connection, an internet connection or the like.

[0026] The home unit 124 may be configured to determine identifying information based on the signal corresponding to the program content being output by the STB 108. For example, the home unit 124 may be configured to decode an embedded ancillary code in the signal received via connection 136 that corresponds to the program currently being delivered by the STB 108 for display on the television 120. Alternatively or additionally, the home unit 124 may be configured to generate a program signature based on the signal received via connection 136 that corresponds to the program currently being delivered by the STB 108 for display on the television 120. The home unit may then add this program identifying information to the viewing records corresponding to the currently displayed program.

[0027] To facilitate the determination of program identifying information and the generation of viewing records for the currently displayed program content, the home unit 124 may also be provided with one or more

sensors 144. For example, one of the sensors 144 may be a microphone placed in the proximity of the television 120 to receive audio signals corresponding to the program being displayed. The home unit 124 may then process the audio signals received from the microphone 144 to decode any embedded ancillary code(s) and/or generate one or more audio signatures corresponding to a program being displayed. Another of the sensors 144 may be an on-screen display detector for capturing images displayed on the television 120 and processing regions of interest in the displayed image. The regions of interest may correspond, for example, to a broadcast channel associated with the currently displayed program, a broadcast time associated with the currently displayed program, a viewing time associated with the currently displayed program, etc. An example on-screen display detector is disclosed by Nelson, et al. in U.S. Provisional Patent Application Serial No. 60/523,444 which is hereby incorporated by reference. Yet another of the sensors 144 could be a frequency detector to determine, for example, the channel to which the television 120 is tuned. One having ordinary skill in the art will recognize that there are a variety of sensors 144 that may be coupled with the home unit 124 to facilitate generation of viewing records containing sufficient information for the central office to determine a set of desired ratings and/or metering results.

[0028] The example home entertainment system 102 also includes a remote control device 160 to transmit control information that may be received by any or all of the STB 108, the television 120 and the home unit 124. One having ordinary skill in the art will recognize that the remote control

device 160 may transmit this information using a variety of techniques, including, but not limited to, infrared (IR) transmission, radio frequency transmission, wired/cabled connection, and the like.

[0029] The example local metering system 100 also includes a people meter 164 to capture information about the audience. The example people meter 164 may have a set of input keys, each assigned to represent a single viewer, and may prompt the audience members to indicate that they are present in the viewing audience by pressing the appropriate input key. The people meter 164 may also receive information from the home unit 124 to determine a time at which to prompt the audience members. Moreover, the home unit 124 may receive information from the people meter 164 to modify an operation of the home unit 124 (such as causing the home unit to generate one or more viewing records based on a change in the viewing audience). As will be appreciated by one having ordinary skill in the art, the people meter 164 may receive and/or transmit information using a variety of techniques, including, but not limited to, infrared (IR) transmission, radio frequency transmission, wired/cabled connection, and the like. As will also be appreciated by one having ordinary skill in the art, the people meter 164 may be implemented by a combination of the remote control device 160 and one or more of the STB 108 and/or the home unit 124. In such an implementation, the STB 108 and/or the home unit 124 may be configured to display prompting information and/or other appropriate people meter content directly on the television 120. Correspondingly, the remote control device 160 may be configured to accept inputs from the viewing audience and transmit these user

inputs to the appropriate device responsible for generating the people meter display on the television 120.

[0030] FIG. 2 illustrates an example monitoring system 200 to monitor viewing of program content provided by an example broadcast system 201. The example broadcast system 201 of FIG. 2 includes a broadcast station 202 that receives audio/video content from a plurality of content providers 204 and 206. The audio/video content providers 204 and 206 may provide audio and/or video programs or information, such as television programs, advertisements, audio (e.g., radio) programs, still image information (e.g., web pages), etc., in known manners to the broadcast station 202.

[0031] The example monitoring system 200 of FIG. 2 includes one or more reference sites 208, a plurality of local metering systems 209 (for example, a set of systems similar or identical to the local metering system 100 of FIG. 1) located at a plurality of home sites 210 (which may be statistically selected to represent a larger population) and a central facility 211 to compile and process data collected by the local metering systems 209. For ease of reference, only one home site 210, one reference site 208 and one central facility 211 is shown in FIG. 2. However, persons of ordinary skill in the art will appreciate that any number of home sites 210, reference sites 208 and/or central data collection and processing facilities 211 may be employed.

[0032] The broadcast station 202 transmits one or more signals containing digital and/or analog audio/video content information. These signals are received by at least one reference site 208 and at least one statistically selected home site 210 via communication paths or links 212 and

214, respectively. The communication paths or links 212 and 214 may include any combination of hardwired or wireless links, such as satellite links, wireless land-based links, cable links, etc. The signals conveyed via the links 212 and 214 may contain multi-program analog signals and/or digital data streams which are commonly employed within existing broadcast systems.

[0033] In the example monitoring system 200, the reference site 208 includes a plurality of receivers (e.g., set-top boxes or the like) 216, 218 and 220 that simultaneously demodulate, demultiplex and/or decode audio, video and/or other information received from the broadcast station 202. In the illustrated example, each of the receivers 216, 218 and 220 provides audio and/or video information associated with a different program that is currently being broadcast to a reference site processor 222. In other words, the receiver 216 may provide audio and/or video information associated with a program A while the receivers 218 and 220 provide audio and/or video information associated with respective programs B and C. In addition, the reference site processor 222 is configured to control each of the receivers 216, 218 and 220 and/or has information indicating a program to which each of the receivers 216, 218 and 220 is tuned at any given time.

[0034] The reference site processor 222 may determine the original broadcast date/time stamps, decode reference ancillary code information and/or generate reference signature information for a plurality of simultaneously broadcast audio/video content. The reference site processor 222 sends the original broadcast time stamps and the reference code and/or signature information to a central facility processor 224 which stores the

original broadcast time stamps and the reference code and/or signature information in a database 226.

[0035] The home site 210 could be, for example, a statistically selected home containing a television, a radio, a computer, etc. The home site 210 includes an output device 228 (e.g., a video display, speaker, etc., such as the television 120 of FIG. 1). The home site 210 also includes a receiver 230, such as the STB 108 of FIG. 1, which may be similar or identical to the receivers 216, 218 and 220. Such receivers are well-known and, thus, are not described in greater detail herein. The receiver 230 provides audio and/or video signals 232 to the output device 228 that are used to present the program currently selected for consumption.

[0036] To monitor the use of the receiver 230, the home site 210 is provided with a local metering system 209, such as the local metering system 100 of FIG. 1. The local metering system 209 may include, for example, a home unit such as the home unit 124. The receiver 230 provides an audio and/or a video signal containing audio and/or video information associated with the currently displayed program to the local metering system 209 via a connection 234. The local metering system 209 uses the signal received via the connection 234 to decode ancillary code information and/or generate signature information corresponding to the program currently being displayed on the output device 228. The local metering system 209 stores and periodically conveys this code and/or signature information to the central facility processor 224, for example, in the form of a viewing record or set of records.

[0037] The central facility processor 224, in addition to being able to perform other processing tasks, is configured to compare code and/or signature information generated at the home site 210 to the reference code and/or signature information stored in the database 226 to identify the channels and/or programs that were displayed at the home site 210. To facilitate the comparison of code and/or signature information received from the reference site 208 to the code and/or signature information received from the home site 210, the reference site processor 222 and the local metering system 209 may generate time stamp information and associate such time stamp information with the code and/or signature information collected at the corresponding time. In this manner, the central facility processor 224 can attempt to align the code and/or signature information received from the reference sites 208 with the code and/or signature information collected at the corresponding times via the home site 210 to thereby reduce the number of comparisons required to identify a match.

[0038] FIG. 3 illustrates an example monitoring system for video-on-demand (VOD) programming that may employ metered data from a VOD server and/or a statistically selected home. In the example environment of use of FIG. 3, the VOD system includes a VOD server 304, a distribution network 308 and multiple subscriber STBs 312, 316. The VOD server 304 may be implemented as a single server or a collection of servers located in a central location or multiple, distributed geographical locations. The VOD server 304 stores the VOD content to be transmitted to the subscriber STBs 312, 316. The distribution network 308 may be any distribution network that is able to

transmit VOD content to a subscriber location (e.g., an RF television broadcaster, a cable television service provider, a satellite service provider, etc.). For example, the distribution network 308 may be implemented by the broadcast station 202 and the communication paths 212 and 214 of FIG. 2. The subscriber STBs 312, 316 may be any set-top box, such as the STB 108 of FIG. 1.

[0039] The example monitoring system of FIG. 3 includes a metering home interface 320, such as the local metering system 100 of FIG. 1, coupled to the STB 316. The metering home interface 320 may be used to collect viewing data (e.g., TV ON/OFF data, tuning data, content codes, content signatures, etc.), audience demographics (e.g., via the people meter 164), etc. The example monitoring system also includes a metering server interface 324 to collect data from the VOD server 304. The data may be stored in any appropriate format, for example, an XML format or equivalent, and may include VOD content information, such as the VOD content title, the associated metadata for the VOD content and other subscriber information, such as an STB identifier (ID) for a given subscriber's STB. The metered server data may correspond to all VOD service subscribers, instead of being limited to only those subscribers included in a statistical sampling of selected households.

[0040] The example monitoring system of FIG. 3 also includes a central facility 328, such as the central facility 211 of FIG. 2. The central facility 328 may receive information from the metering server interface 324 and/or the metering home interface 320. The central facility 328 may combine

the information received from both the metering server interface 324 and/or the metering home interface 320 to credit VOD programming and to generate corresponding usage and demographic reports. For example, the central facility 328 may use the STB ID for the STB 316 to match the data from metering home interface 320 to the corresponding data received from the metering server interface 324.

[0041] To better understand the benefits of collecting metering data from a VOD metering server interface (e.g., the metering server interface 324 of FIG. 3), an example viewing record 400 generated by a local metering system, (e.g., the local metering system 100 of FIG. 1 or the metering home interface 320 of FIG. 3) is shown in FIG. 4. The viewing record is typically generated by a home unit, such as the home unit 124 of FIG. 1, and reported to a central facility, such as the central facility 328 of FIG. 3. The home unit 124 may send the stored viewing records to the central facility 328, for example, at periodic intervals (e.g., once a day), continuously, or at a-periodic intervals (e.g., whenever a predetermined event occurs). One having ordinary skill in the art will appreciate that a variety of viewing records substantially equivalent to the viewing record 400 may be generated by the home unit 124. Such viewing records may include metering information in addition to and/or different from the example 400 of FIG. 4, yet may still be used by the methods and/or apparatus described herein.

[0042] Turning to FIG, 4, the example viewing record 400 includes a home unit ID 404 to identify the home unit 124 that generated/reported the viewing record. The viewing record 400 may also include a STB ID 408

corresponding to the STB, such as the STB 316, that selected and/or presented the displayed broadcast or VOD programming content. The home unit ID 404 and/or the STB ID 408 may be used by the central facility 328 to cross-reference the reported viewing record 400 with the corresponding VOD server data provided by the metering server interface 324.

[0043] The example viewing record also includes sets of channel data information 412, 414, 416 corresponding to channels of the STB 316 selected by the user/subscriber. In the instant example, the home unit 124 is configured to poll the STB 316 at periodic intervals (e.g., once every 2.7 sec.) to determine the channel number selected by the STB 316. Additionally, the home unit 124 may be configured with a mapping table, for example, to map sets of channels into larger supersets of channels having similar content. For example, a set of broadcast channels used to carry pay-per-view programming may be grouped into a single superset representing all receivable pay-per-view content. Similarly, a set of broadcast channels used to carry VOD programming may be grouped and represented by a single superset used to indicate that VOD content was selected/output by the STB 316. As a result, the channel data 412, 414 that the home unit 124 includes in the example viewing record 400 may comprise the channel number selected by the STB 316 and the timestamp at which the measurement was taken. Additionally or alternatively, the home unit 124 may include VOD data 416 in the example viewing record 400, with the VOD data 416 including an entry indicating that any member of the superset of VOD channels was selected (represented by "VOD" in FIG. 4) and the timestamp at which the measurement was taken.

Thus, as one having ordinary skill in the art will recognize, the example viewing record 400 may be used to indicate that at least one of a superset of VOD channels was selected by the STB 316. However, the actual VOD channel selected and/or the actual VOD content selected/output by the STB 316 cannot be readily determined solely from the data included in the example viewing record 400.

[0044] To determine the actual selected/displayed VOD content corresponding to a reported viewing record, such as the example viewing record 400 of FIG. 4, a first example process 500 to combine metering data from a VOD server with metering data reported from one or more statistically selected homes is illustrated in the flowchart of FIG. 5. Using FIG. 3 as a reference, to perform the example process 500, a VOD metering server interface, such as the metering server interface 324, is configured to send a database of metering data for all households served by a VOD server, such as the VOD server 304, to a central facility, such as the central facility 328. The central facility 328 stores the data in this database and then cross-references such data based on, for example, the home unit ID 404 and/or the STB ID 408 provided in the example viewing record 400. The central facility 328 may then augment the VOD data reported in the viewing record 400 with the corresponding, specific VOD content information included in the VOD server metering database provided by the metering server interface 324.

[0045] Turning to FIG. 5, the example process 500 begins at block 504 at which the metering server interface 324 sends the VOD server metering database for all households served by the VOD server 304 to the central

facility 328. The metering server interface 324 may be configured to send this database at predetermined times, for example, at periodic (e.g., daily) intervals. Alternatively, the metering server interface 324 may send the database upon the occurrence of one or more predetermined events (e.g., in response to a request from the central facility 328, when a predetermined amount of data is collected, etc.). At some time or times after processing at block 504 completes, control proceeds to block 508 at which the central facility 328 gets one or more viewing records (such as the example viewing record 400 of FIG. 4) received from at least one metering home interface 320 (e.g., records generated and reported by a home unit, such as home unit 124, included in the metering home interface 320). Then at block 512, the central facility 328 determines whether VOD data (e.g., VOD data 416) is included in the reported viewing record 400. If VOD data is present (block 512), control proceeds to block 516.

[0046] If VOD data 416 is present in the received viewing record 400 (block 512), control proceeds to block 516 at which the central facility 328 uses, for example, the reported home unit ID 404 and/or the STB ID 408 to cross-reference the VOD server metering database received at block 504. If a match is found (block 520), control proceeds to block 524 at which the central facility 328 selects the corresponding entry or entries in the VOD server metering database and combines the selected VOD server metering data with the reported viewing record 400 being processed (e.g., by replacing the generic VOD data 416 with specific VOD server metering data included in the VOD server metering database). If, however, a cross-referencing match is not

found (block 520), control proceeds to block 528 at which the central facility 328 indicates that VOD server metering information is not available for the viewing record 400 being processed. Control then proceeds from either block 524 or block 528 to block 532.

[0047] At block 532, the central facility 328 determines whether the viewing record 400 is the last viewing record to be processed. If the viewing record 400 is not the last record to be processed (block 532), control returns to block 508 and blocks subsequent thereto at which the central facility 328 processes the next received viewing record. Conversely, if the viewing record 400 is the last record to be processed (block 532), control proceeds to block 536 at which the central facility 328 generates ratings/metering reports for home sites that reported viewing records 400 corresponding to the presentation of VOD programming content. The example process 500 then ends.

[0048] One having ordinary skill in the art will appreciate that processing represented by blocks 508 through 536 may be executed, for example, on an event-driven basis corresponding to the receipt of one or more viewing records from one or more households. Such processing may also be iterated multiple times, for example, one iteration for each received viewing record, one iteration for each instance of reported VOD data in a received viewing record, etc.

[0049] FIG. 6 is a flowchart of a second example process 600 to monitor VOD programming that may combine metering data from a VOD server with metering data from one or more statistically selected homes. Again using FIG. 3 as a reference, for the example process 600, a central

facility, such as the central facility 328, is configured to receive one or more viewing records, such as the example viewing record 400 of FIG. 4, from one or more metering home interfaces, such as the metering home interface 320. The central facility 328 then queries at least one metering server interface, such as the metering server interface 324, to provide VOD content metering information corresponding to the household represented by the received viewing record 400 (e.g., by querying a particular metering server interface 324 or a subset of such interfaces corresponding to the household identified by the home unit ID 404 and/or the STB ID 408 provided in the example viewing record 400, or querying all available metering server interfaces 324 to provide data corresponding to the home unit ID 404 and/or the STB ID 408). The metering server interface 324 returns such information based on data obtained from a monitored VOD server, such as the VOD server 304. The central facility 328 then combines the queried VOD server metering information with the reported metering information in the viewing record 400 to generate the appropriate ratings/metering report(s).

[0050] Turning to FIG. 6, processing begins at block 604 at which the central facility 328 gets one or more viewing records (such as the example viewing record 400 of FIG. 4) received from at least one metering home interface 320 (e.g., generated and reported by a home unit, such as home unit 124, included in the metering home interface 320). Then at block 608, the central facility 328 determines whether VOD data (e.g., VOD data 416) is included in the reported viewing record 400. If VOD data is present (block 608) control proceeds to block 612 and blocks subsequent thereto.

[0051] If VOD data 416 is present in the received viewing record 400 (block 608), control proceeds to block 612 at which the central facility 328 uses, for example, the reported home unit ID 404 and/or the STB ID 408 to query one or more metering server interfaces 324 corresponding to one or more VOD servers 304. In the instant example, the metering server interface 324 and/or a combination of the metering server interface 324 and the VOD server 304 maintains a VOD server metering database corresponding to all households served by the VOD server 304. If a match is found (block 616), control proceeds to block 620 at which the metering server interface 324 returns the corresponding entry or entries in the VOD server metering database and the central facility 328 combines such VOD server metering data with the reported viewing record 400 being processed (e.g., by replacing the generic VOD data 416 with specific VOD server metering data returned by the metering server interface 324). If, however, a cross-referencing match is not found (block 616), control proceeds to block 624 at which the central facility 328 indicates that VOD server metering information is not available for the viewing record 400 being processed. Control then proceeds from either block 620 or block 624 to block 628.

[0052] At block 628, the central facility 328 determines whether the viewing record 400 is the last viewing record to be processed. If the viewing record 400 is not the last record to be processed (block 628), control returns to block 604 and blocks subsequent thereto at which the central facility 328 processes the next received viewing record. Conversely, if the viewing record 400 is the last record to be processed (block 628), control proceeds to block

632 at which the central facility 328 generates ratings/metering reports for home sites that reported viewing records 400 corresponding to the presentation of VOD programming content. The example process 600 then ends.

[0053] One having ordinary skill in the art will appreciate that the example process 600 may be executed, for example, on an event-driven basis corresponding to the receipt of one or more viewing records from one or more households. Such processing may also be iterated multiple times, for example, one iteration for each receiver viewing record, one iteration for each instance of reported VOD data in a received viewing record, etc.

[0054] A flowchart representative of example machine readable instructions for implementing at least portions of the VOD server 304 and/or the metering server interface 324 of FIG. 3 is shown in FIGS. 7A-7C. In this example, the process represented by the flowchart may be implemented by a set of machine readable instructions that may comprise one or more programs for execution by a processor, such as the processor 912 shown in the example computer 900 discussed below in connection with FIG. 9. The one or more programs may be embodied in software stored on a tangible medium such as a CD-ROM, a floppy disk, a hard drive, a DVD, or a memory associated with the processor 912, but persons of ordinary skill in the art will readily appreciate that the entire program and/or portions thereof could alternatively be executed by a device other than the processor 912 and/or embodied in firmware or dedicated hardware in a well-known manner. For example, any or all of the VOD server 304 and the metering server interface 324 could be implemented by any combination of software, hardware, and/or firmware.

Further, although the example programs are described with reference to the flowchart illustrated in FIGS. 7A-7C, persons of ordinary skill in the art will readily appreciate that many other methods of implementing the example methods and apparatus described herein may alternatively be used. For example, with reference to the flowchart illustrated in FIGS. 7A-7C, the order of execution of the blocks may be changed, and/or some of the blocks described may be changed, eliminated, combined and/or subdivided into multiple blocks.

[0055] An example program 700 to implement at least portions of the VOD server 304 and/or the metering server interface 324 of FIG. 3 is shown in FIGS 7A-7C. The example program 700 may be used to create the VOD server database (or contents thereof) provided as input to the example processes 500 and 600 of FIGS. 5 and 6, respectively. The program 700 may be executed in response to VOD service requests (e.g., VOD content selections) sent by, for example, the STB 316 to the VOD server 304. The example program 700 begins at block 702 of FIG. 7A at which the VOD server 304 determines that the STB 316 has selected a VOD channel for display. In response, the VOD server 304 generates an OD-START-SESSION information packet at block 702 to indicate that an on-demand (e.g., VOD) session was initiated corresponding to the selection of the VOD channel. The OD-START_SESSION packet marks the beginning of a VOD session and may contain descriptive information such as the STB ID of the STB 316, a unique session identifier to identify the particular VOD session established between the VOD server 304 and the STB 316, and a timestamp to indicate

when the VOD session was initiated. Control then proceeds to block 704 at which the VOD server 304 generates an OD-INFORMATION information packet to provide additional descriptive information regarding the current VOD session.

[0056] An OD-INFORMATION packet may include, for example, any or all of the following data: the STB ID of the STB 316, the session ID, a timestamp, an overall bitrate for the VOD session, a description of the VOD session connection type (e.g., TCP, UDP, etc.), one or more counters indicating any errors (e.g., stream errors, communications errors, system errors, etc.) that may have occurred since initiation of the VOD session, major and/or minor channel numbers corresponding to the VOD channel selected by the STB 316, etc. OD-INFORMATION packets may be generated at various times throughout the duration of a VOD session, for example, at session initiation (block 704), at session termination (block 728 described below) and at periodic (e.g., five minute) intervals while the VOD session is active (block 712 described below). Control then proceeds to block 706.

[0057] Upon selection of a VOD channel, the VOD server 304 may cause a VOD navigation menu to be displayed via the STB 316. Additionally or alternatively, an audience member may cause a navigation menu to be displayed, for example, by pressing an appropriate input key on a remote control device, such as the remote control device 160 of FIG. 1. Thus, at block 706 the VOD server 304 determines whether a navigation session has been initiated. If a navigation session has been enabled (block 706), control

proceeds to block 708 at which the VOD server 304 generates an OD-NAVIGATION packet.

[0058] An OD-NAVIGATION packet may include, for example, any or all of the following data: the STB ID of the STB 316, the session ID, a timestamp, a navigation code to indicate the usage of the navigation menu (e.g., an up arrow button press, a down arrow button press, a page up button press, a page down button press, a program information (info) button press, a select/OK button press, etc.), etc. Thus, multiple OD-NAVIGATION packets may be generated during an active navigation session as the audience member navigates through the navigation menu. Upon termination of the navigation session or if a navigation session was not initiated, control proceeds to block 710.

[0059] At block 710, the VOD server 304 generates an OD-START_STREAM information packet corresponding to the VOD content stream sent by the VOD server 304 for display via the STB 316. Multiple VOD content streams may be activated throughout the duration of a VOD session. For example, after a VOD session is initiated (e.g., through selection of a VOD channel) and a navigation session, if applicable, terminates, the VOD server 304 may initiate a VOD content stream that carries a movie trailer or a targeted advertisement. The OD-START_STREAM packet of the illustrated example includes descriptive data corresponding to the active VOD content stream, such as any or all of the following: the STB ID of the STB 316, the session ID, a timestamp, a stream ID to uniquely identify the active VOD content stream, a program/asset ID to uniquely identify the content (e.g.,

movie trailer, advertisement, VOD program, etc.) being carried by the VOD content stream, a program/asset title, a program/asset type identifier (e.g., pay-per-view movie, free movie on-demand, advertisement, long advertisement, targeted advertisement, etc.), a station/studio ID to uniquely identify the originator of the VOD content, a station/studio name, a genre identifier to indicate the genre to which the VOD content belongs (e.g., talk show, drama, sporting event, etc.), an MPA rating for the VOD content carried by the active stream, etc. After the OD-START_STREAM packet is generated, control proceeds to block 712 at which the VOD server 304 generates another OD-INFORMATION packet corresponding to the active VOD content stream. Control then proceeds to block 714 of FIG. 7B.

[0060] At block 714, the VOD server 304 determines whether an audience member has activated a trick-mode of operation via the STB 316. The VOD server may support trick-mode capability to allow the viewer to alter the linear nature of the VOD content stream. Trick-modes may include fast-forward, rewind, pause, play, etc. For example, an audience member may pause, via the pause trick-mode, a displayed VOD program to place a telephone call. The audience member may then resume the VOD program after completing the telephone call via the play trick-mode. Thus, multiple trick-modes may occur during the duration of an active VOD content stream. If the VOD server 304 determines that a trick-mode has been enabled (block 714), control proceeds to block 716 at which the VOD server 304 generates an OD_TRICKMODE information packet corresponding to the enabled trick-mode.

[0061] An OD-TRICKMODE packet may include, for example, any or all of the following data: the STB ID of the STB 316, the session ID, a timestamp, the stream ID, a trick indicator to indicate the type of trick-mode that was enabled (e.g., fast-forward, rewind, pause, play, etc.), a trick-mode offset timestamp that represents an offset between the time at which the VOD content stream was initiated and the time at which the trick-mode was enabled, etc. After the OD-TRICKMODE is generated, control returns to block 712 of FIG. 7A at which the VOD server 304 generates another OD-INFORMATION packet corresponding to the enabled trick-mode. Control then proceeds to block 714 of FIG. 7B and blocks subsequent thereto at which the VOD server 304 determines whether another trick-mode has been enabled.

[0062] If at block 714 the VOD server 304 determines that a trick-mode was not enabled, control proceeds to block 718 at which the VOD server determines whether a periodic information reporting timer has expired. If such a timer has expired (block 718), control returns to block 712 of FIG. 7A at which the VOD server 304 generates another OD-INFORMATION packet corresponding to the active VOD content stream. Control then proceeds again to block 714 at which the VOD server 304 checks whether a trick-mode has been enabled.

[0063] If at block 718 the VOD server 304 determines that the timer has not expired, control proceeds to block 720 at which the VOD server 304 determines whether the current VOD content stream has terminated (e.g., a targeted advertisement has completed prior to the start of a VOD program). If at block 720 the VOD server 304 determines that the VOD content stream has

not terminated (i.e., is still active), control returns to block 714 of FIG. 7B at which the VOD server 304 again checks whether a trick-mode has been enabled.

[0064] If at block 720 the VOD server determines that the current VOD content stream has terminated, control proceeds to block 722 at which the VOD server generates an OD-STOP STREAM information packet corresponding to the terminated VOD content stream. The OD-STOP STREAM packet may include, for example, information such as the STB ID of the STB 316, the session ID, a timestamp, the stream ID, etc. Control then proceeds to block 724 at which the VOD server 304 generates another OD-INFORMATION packet corresponding to the terminated VOD content stream. Control then proceeds to block 726 of FIG. 7C at which the VOD server 304 determines whether the current VOD session has terminated. If the VOD session has not terminated (i.e., is still active), control returns to block 710 of FIG. 7A at which the VOD server 304 generates another OD-START_SESSION packet corresponding to the next initiated VOD content stream (e.g., a VOD program starting after the completion of a previous movie trailer or targeted advertisement).

[0065] If, however, at block 726 the VOD server 304 determines that the current VOD session has terminated, control proceeds to block 728 at which the VOD server generates another OD-INFORMATION packet corresponding to the terminated VOD session. Control then proceeds to block 730 at which the VOD server 304 generates an OD-END-SESSION packet corresponding to the terminated VOD session. The OD-END-SESSION

packet may include, for example, information such as the STB ID of the STB 316, the session ID, a timestamp, etc. After generation of the OD-END-SESSION packet, the example program 700 of FIGS. 7A-7C ends.

[0066] One having ordinary skill in the art will appreciate that the execution order of at least some of the blocks in the example program 700 of FIGS. 7A-7C may be varied as needed to support generation of VOD server database information in addition to that described above. For example, to support generation of OD-NAVIGATION packets in cases in which the viewer activates a navigation menu during presentation of a VOD program, blocks 706 and 708 could also be executed in an interrupt handler triggered by the activation of the navigation menu. One having ordinary skill in the art will also appreciate that, while the example program 700 was described as being executed via the VOD server 304, other substantially equivalent implementations may be employed. For example, the example program 700 could be executed via the metering server interface 324 or a combination of the VOD server 304 and the metering server interface 324.

[0067] Example VOD server information packets that may be generated by the example program 700 of FIGS. 7A-7C are shown in FIGS. 8A-8G. As described above, these information packets may be used to create the VOD server database (or contents thereof) provided as input to the example processes 500 and 600 of FIGS. 5 and 6, respectively. The example information packets illustrated in FIGS. 8A-8G include an OD-START-SESSION packet, an OD-END-SESSION packet, an OD-INFORMATION

packet, an OD-START-STREAM packet, an OD-STOP-STREAM packet, an OD-NAVIGATION packet and an OD-TRICKMODE packet.

[0068] Example OD-START-SESSION and OD-END-SESSION information packets are shown in FIGS. 8A and 8B, respectively. An OD-START-SESSION packet may be generated, for example, at block 702 of the example program 700 of FIG. 7A-7C to indicate the start of a VOD session. Similarly, the program 700 may generate an OD-END-SESSION packet at block 730 to indicate the end of a VOD session. Both of the example OD-START-SESSION and OD-END-SESSION packets have similar information fields, including an STB ID field, a session ID field and a timestamp field. As shown in FIGS. 8A and 8B, the STB ID is a unique identifier that may correspond, for example, to the MAC (medium-access-control) address of the STB that initiated the VOD session (e.g., STB 316 of FIG. 3). The session ID is a unique identifier corresponding to the VOD session initiated between an STB and a VOD server (e.g., the STB 316 and the VOD server 304). The timestamp includes the date and time at which the respective OD-START-SESSION or OD-END-SESSION packet was generated.

[0069] An example OD-INFORMATION packet is shown in FIG. 8C. An OD-INFORMATION packet may be generated, for example, at various blocks of the example program 700 of FIG. 7A-7C to provide descriptive information regarding a variety of events. For example, OD-INFORMATION packets may be generated at block 704 to further describe an initiated VOD session, at block 712 to further describe an initiated VOD content stream and/or VOD content stream modified via a trick-mode, at block 724 to further

describe a terminated VOD content stream and/or at block 728 to further describe a terminated VOD session. The example OD-INFORMATION packet of FIG. 8C has multiple information fields, including an STB ID field, a session ID field, a timestamp field, a bitrate field, a connection type field, a stream errors field, a communication errors field, a system errors field and a channel number field. The format and contents of the STB ID field, the session ID field and the timestamp field are similar to that of the OD-START-SESSION and OD-END-SESSION packets described above and, as such, are not described further herein. The bitrate field indicates the aggregate bit rate of the active VOD session. The connection type field includes an identifier corresponding to the specific type of data connection that carries the active VOD session (e.g., TCP, UDP, etc.). The stream errors, communication errors and system errors fields include counter values corresponding to the number of stream errors, communication errors and system errors, respectively, that have occurred since initiation of the active VOD session. The channel number field includes an identifier corresponding to the selected VOD channel (e.g., major and minor channel) used to send the selected VOD content from a VOD server to an STB (e.g., the VOD server 304 and the STB 316 of FIG. 3).

[0070] Example OD-START-STREAM and OD-STOP-STREAM information packets are shown in FIGS. 8D and 8E, respectively. An OD-START-STREAM packet may be generated, for example, at block 710 of the example program 700 of FIG. 7A-7C to indicate the start of a VOD content stream. Similarly, the program 700 may generate an OD-STOP-STREAM packet at block 722 to indicate the termination of a VOD stream. Both of the

example OD-START-STREAM and OD-STOP-STREAM packets have similar information fields, including an STB ID field, a session ID field, a timestamp field and a stream ID field. The format and contents of the STB ID field, the session ID field and the timestamp field are similar to that of the OD-START-SESSION and OD-END-SESSION packets described above and, as such, are not described further herein. The stream ID field is a unique identifier corresponding to the current VOD content stream being used to carry the VOD content for the active VOD session.

[0071] The example OD-START-STREAM information packet of FIG. 8D also includes additional fields, such as a program/asset ID field, a program/asset title field, a program/asset type field, a station/studio ID field, a station/studio name field, a genre field and an MPA rating field. The program/asset ID field includes a unique identifier corresponding to the content (e.g., movie trailer, advertisement, VOD program, etc.) being carried by the VOD content stream. The program/asset title field includes the name of current VOD program/asset. The program/asset type field includes an identifier corresponding to the type of the current VOD program/asset (e.g., pay-per-view movie, free movie on-demand, advertisement, long advertisement, targeted advertisement, etc.). The station/studio ID field includes a unique identifier corresponding to the originator of the current VOD program/asset. The station/studio name field includes the name of the originator of the current VOD program/asset. The genre field includes an identifier to indicate the genre to which the current VOD content belongs (e.g.,

talk show, drama, sporting event, etc.). The MPA rating field includes the MPA rating assigned to the VOD content carried by the active stream.

[0072] An example OD-NAVIGATION packet is shown in FIG. 8F. An OD-NAVIGATION packet may be generated, for example, at block 708 of the example program 700 of FIG. 7A-7C to provide information corresponding to the activation of a VOD navigation menu. The example OD-NAVIGATION packet has information fields, including an STB ID field, a session ID field, a timestamp field and a navigation code field. The format and contents of the STB ID field, the session ID field and the timestamp field are similar to that of the OD-START-SESSION and OD-END-SESSION packets described above and, as such, are not described further herein. The navigation code field includes an identifier corresponding to the usage of the navigation menu (e.g., an up arrow button press, a down arrow button press, a page up button press, a page down button press, a program information (info) button press, a select/OK button press, etc.).

[0073] An example OD-TRICKMODE packet is shown in FIG. 8G. An OD- TRICKMODE packet may be generated, for example, at block 716 of the example program 700 of FIG. 7A-7C to provide information corresponding to initiation of a trick-mode of operation during an active VOD content stream. The example OD- TRICKMODE packet has multiple information fields, including an STB ID field, a session ID field, a timestamp field, a stream ID field, a trick field and an offset timestamp field. The format and contents of the STB ID field, the session ID field, the timestamp field and the stream ID field are similar to that of the OD-START-STREAM and OD-

STOP-STREAM packets described above and, as such, are not described further herein. The trick field includes an identifier corresponding to the trick-mode activated by the audience member (e.g., fast-forward, rewind, pause, play, etc.). The offset timestamp field represents an offset between the time at which the VOD content stream was initiated and the time at which the trick-mode was activated.

[0074] FIG. 9 is a block diagram of an example computer 900 capable of implementing the apparatus and methods disclosed herein. The computer 900 can be, for example, a server, a personal computer, a personal digital assistant (PDA), an Internet appliance, or any other type of computing device.

[0075] The system 900 of the instant example includes a processor 912. For example, the processor 912 can be implemented by one or more Intel® microprocessors from the Pentium® family, the Itanium® family or the XScale® family. Of course, other processors from other families are also appropriate. One or more processors such as processor 912 may be used to implement any or all of the home unit 124 and/or the STB 108 (or portions thereof) of FIG. 1, the central facility processor 224 (or portions thereof) of FIG. 2, and/or the VOD server 304 and/or the metering server interface 324 of FIG. 3. A processor such as processor 912 may also be used to implement the example program 700 of FIGS. 7A-7C.

[0076] The processor 912 is in communication with a main memory including a volatile memory 914 and a non-volatile memory 916 via a bus 918. The volatile memory 914 may be implemented by Static Random Access Memory (SRAM), Synchronous Dynamic Random Access Memory

(SDRAM), Dynamic Random Access Memory (DRAM), RAMBUS Dynamic Random Access Memory (RDRAM) and/or any other type of random access memory device. The non-volatile memory 916 may be implemented by flash memory and/or any other desired type of memory device. Access to the main memory 914, 916 is typically controlled by a memory controller (not shown) in a conventional manner.

[0077] The computer 900 also includes a conventional interface circuit 920. The interface circuit 920 may be implemented by any type of well-known interface standard, such as an Ethernet interface, a universal serial bus (USB), and/or a third generation input/output (3GIO) interface.

[0078] One or more input devices 922 are connected to the interface circuit 920. The input device(s) 922 permit a user to enter data and commands into the processor 912. The input device(s) can be implemented by, for example, a keyboard, a mouse, a touchscreen, a track-pad, a trackball, an isopoint and/or a voice recognition system.

[0079] One or more output devices 924 are also connected to the interface circuit 920. The output devices 924 can be implemented, for example, by display devices (e.g., a liquid crystal display, a cathode ray tube display (CRT)), by a printer and/or by speakers. The interface circuit 920, thus, typically includes a graphics driver card.

[0080] The interface circuit 920 also includes a communication device such as a modem or network interface card to facilitate exchange of data with external computers via a network 926 (e.g., an Ethernet connection, a digital subscriber line (DSL), a telephone line, coaxial cable, a cellular telephone

system, etc.). The interface circuit 920 and the network 926 may implement the connection 140 of FIG. 1.

[0081] The computer 900 also includes one or more mass storage devices 928 for storing software and data. Examples of such mass storage devices 928 include floppy disk drives, hard drive disks, compact disk (CD) drives and DVD drives. The mass storage device 928 and/or the volatile memory 914 may be used to store the viewing records in the home unit 124 of FIG. 1. A mass storage device such as the mass storage device 928 may also be used to store the VOD server metering database provided as input to the example processes 500 and/or 600 of FIGS. 5 and 6, respectively.

[0082] As an alternative to implementing the methods and/or apparatus described herein in a system such as the device of FIG. 9, the methods and or apparatus described herein may be embedded in a structure such as a processor and/or an ASIC (application specific integrated circuit).

[0083] Although certain example methods, apparatus and articles of manufacture have been described herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers all methods, apparatus and articles of manufacture fairly falling within the scope of the appended claims either literally or under the doctrine of equivalents.

ABSTRACT

Server based methods and apparatus to determine audience viewing of video-on-demand programs are disclosed. An example method for monitoring a displayed VOD program disclosed herein comprises determining a first set of metering information based on a first set of data collected at a subscriber site, determining a second set of metering information based on a second set of data reported by at least one of a VOD server and a head-end, and combining the first and second sets of metering information to credit the displayed VOD program.

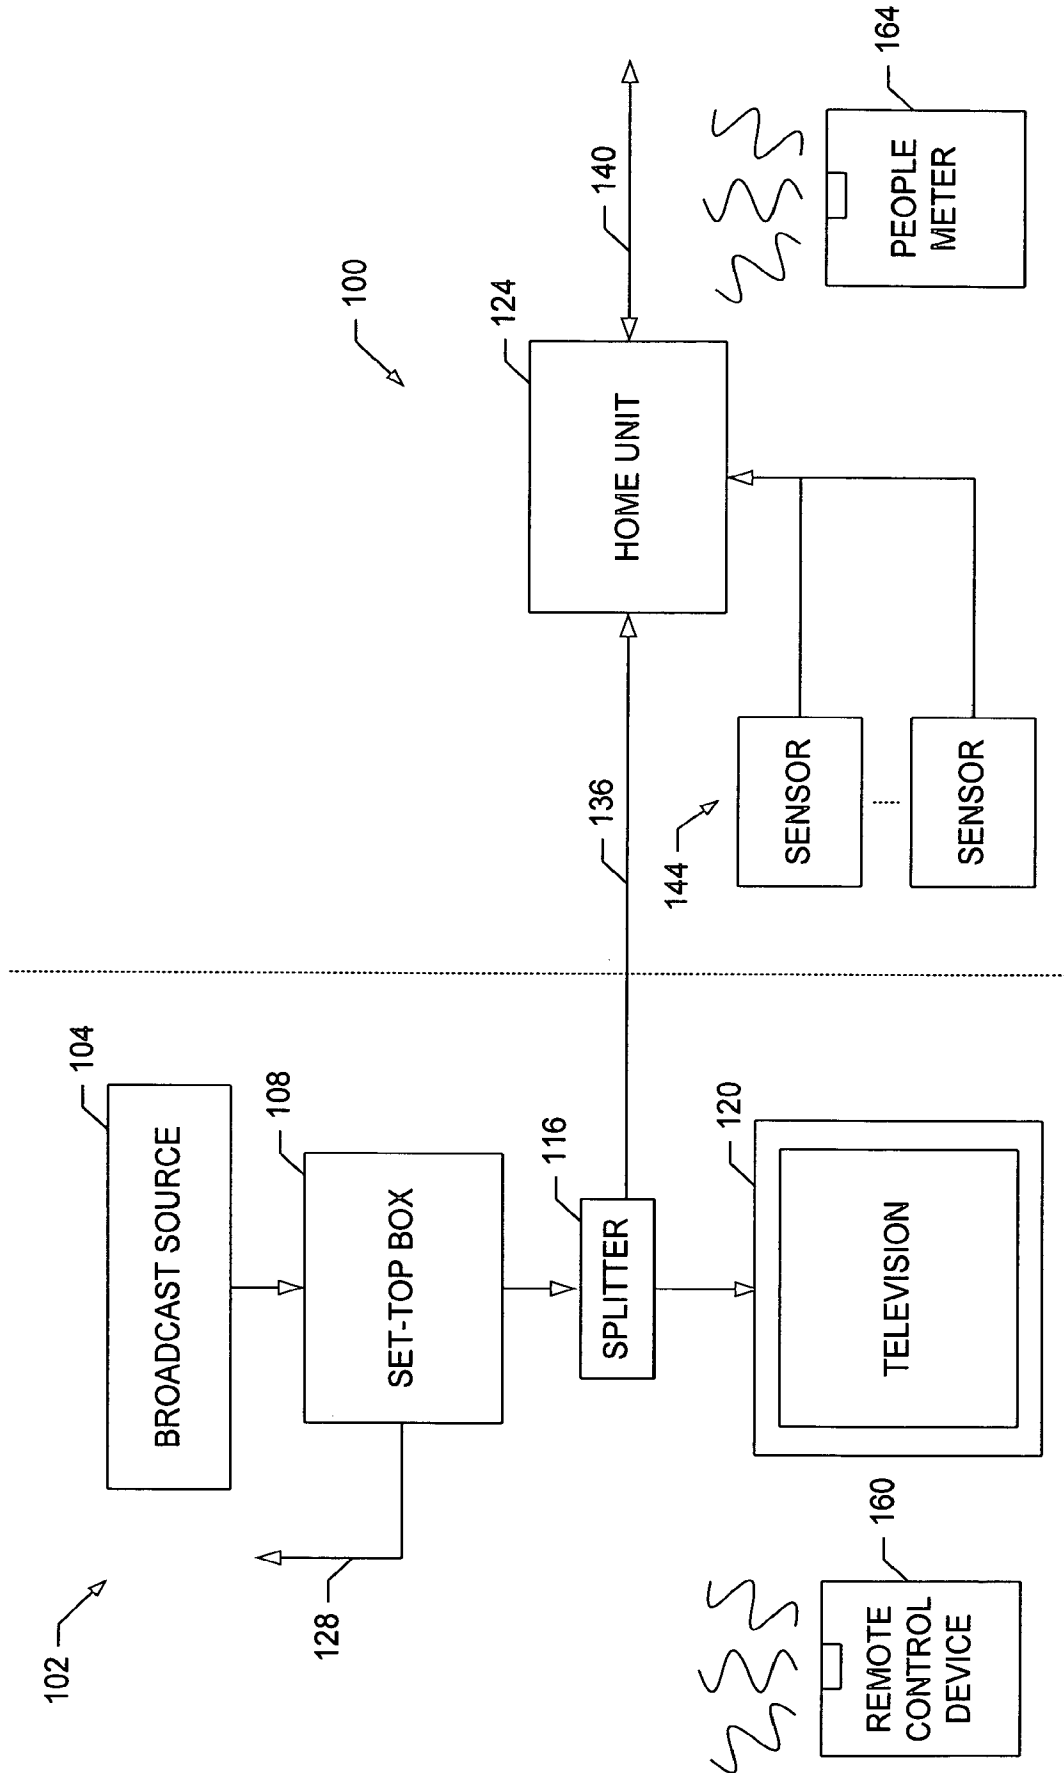


FIG. 1

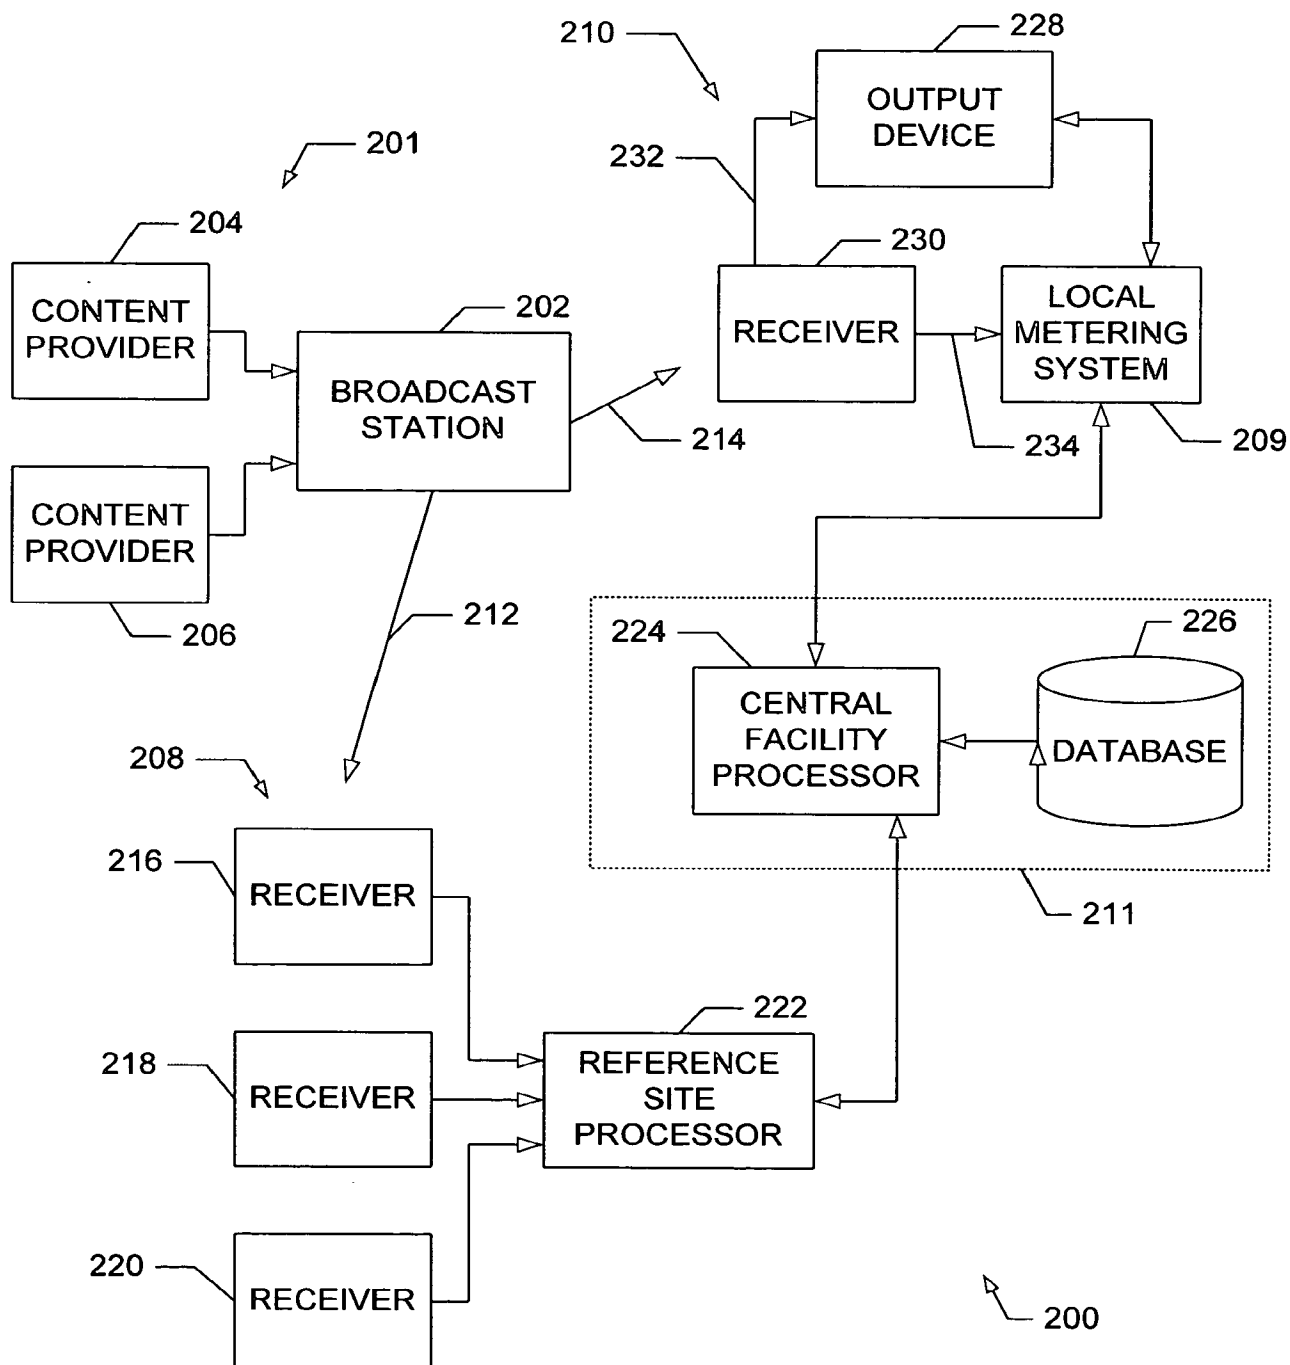


FIG. 2

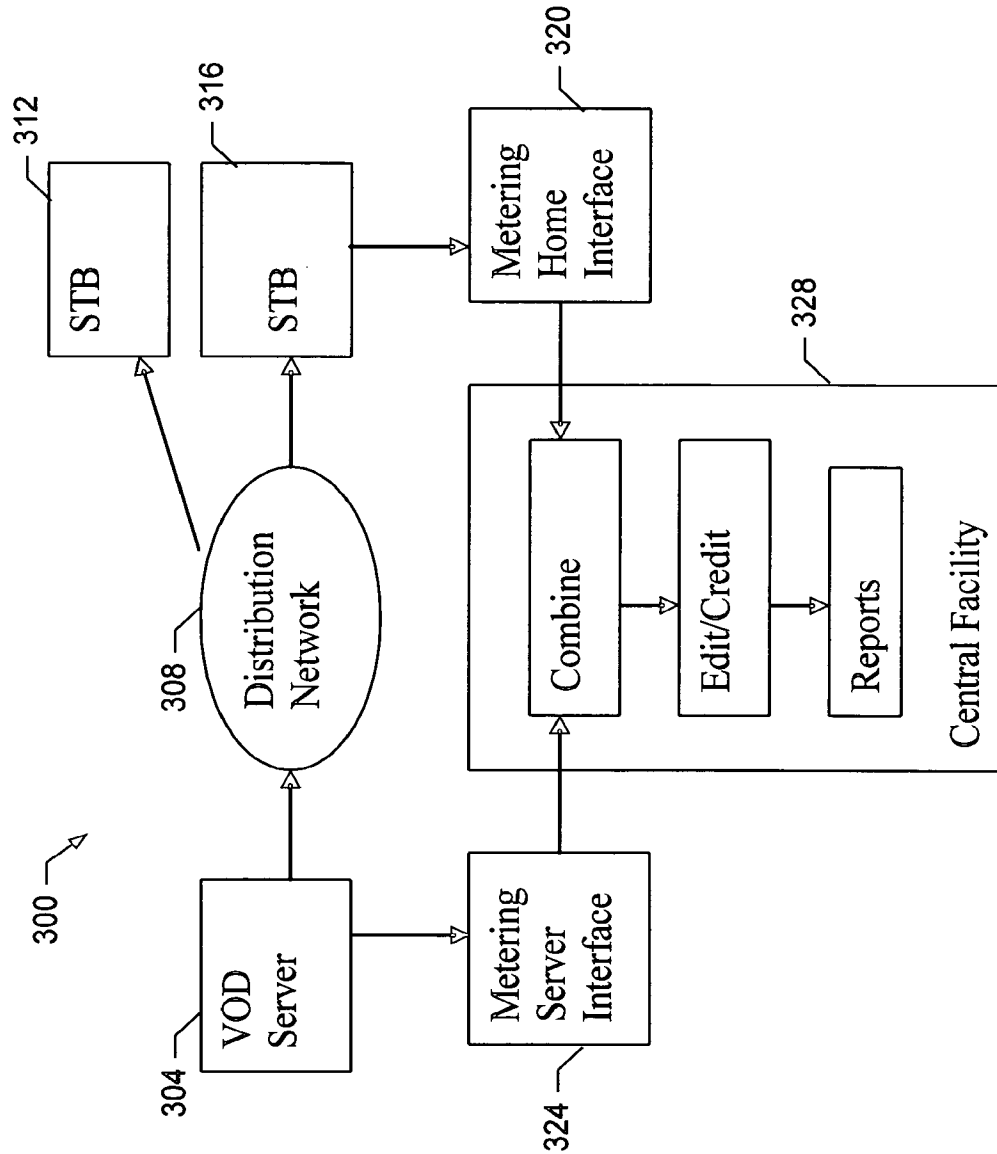


FIG. 3

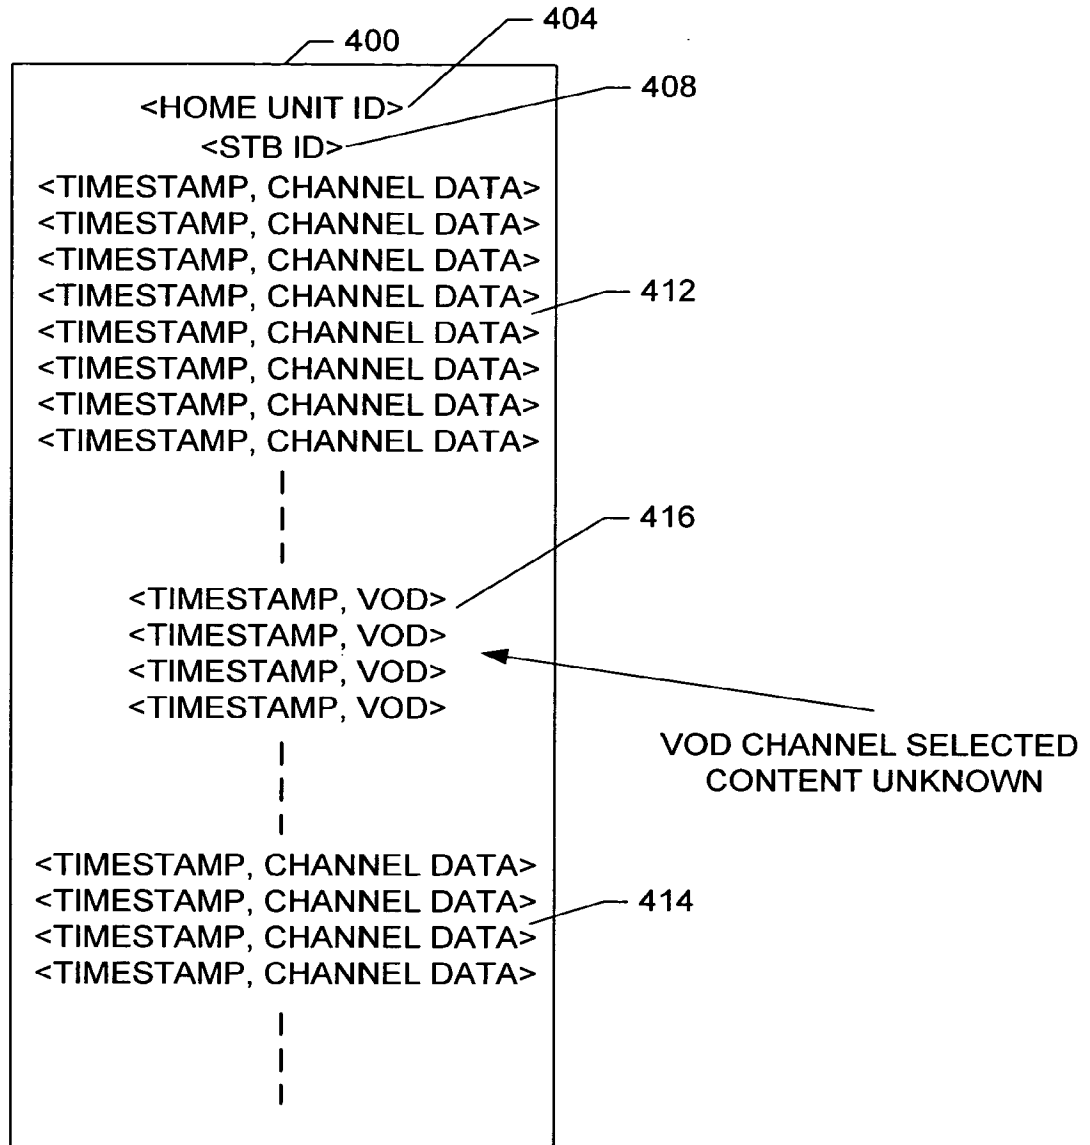


FIG. 4

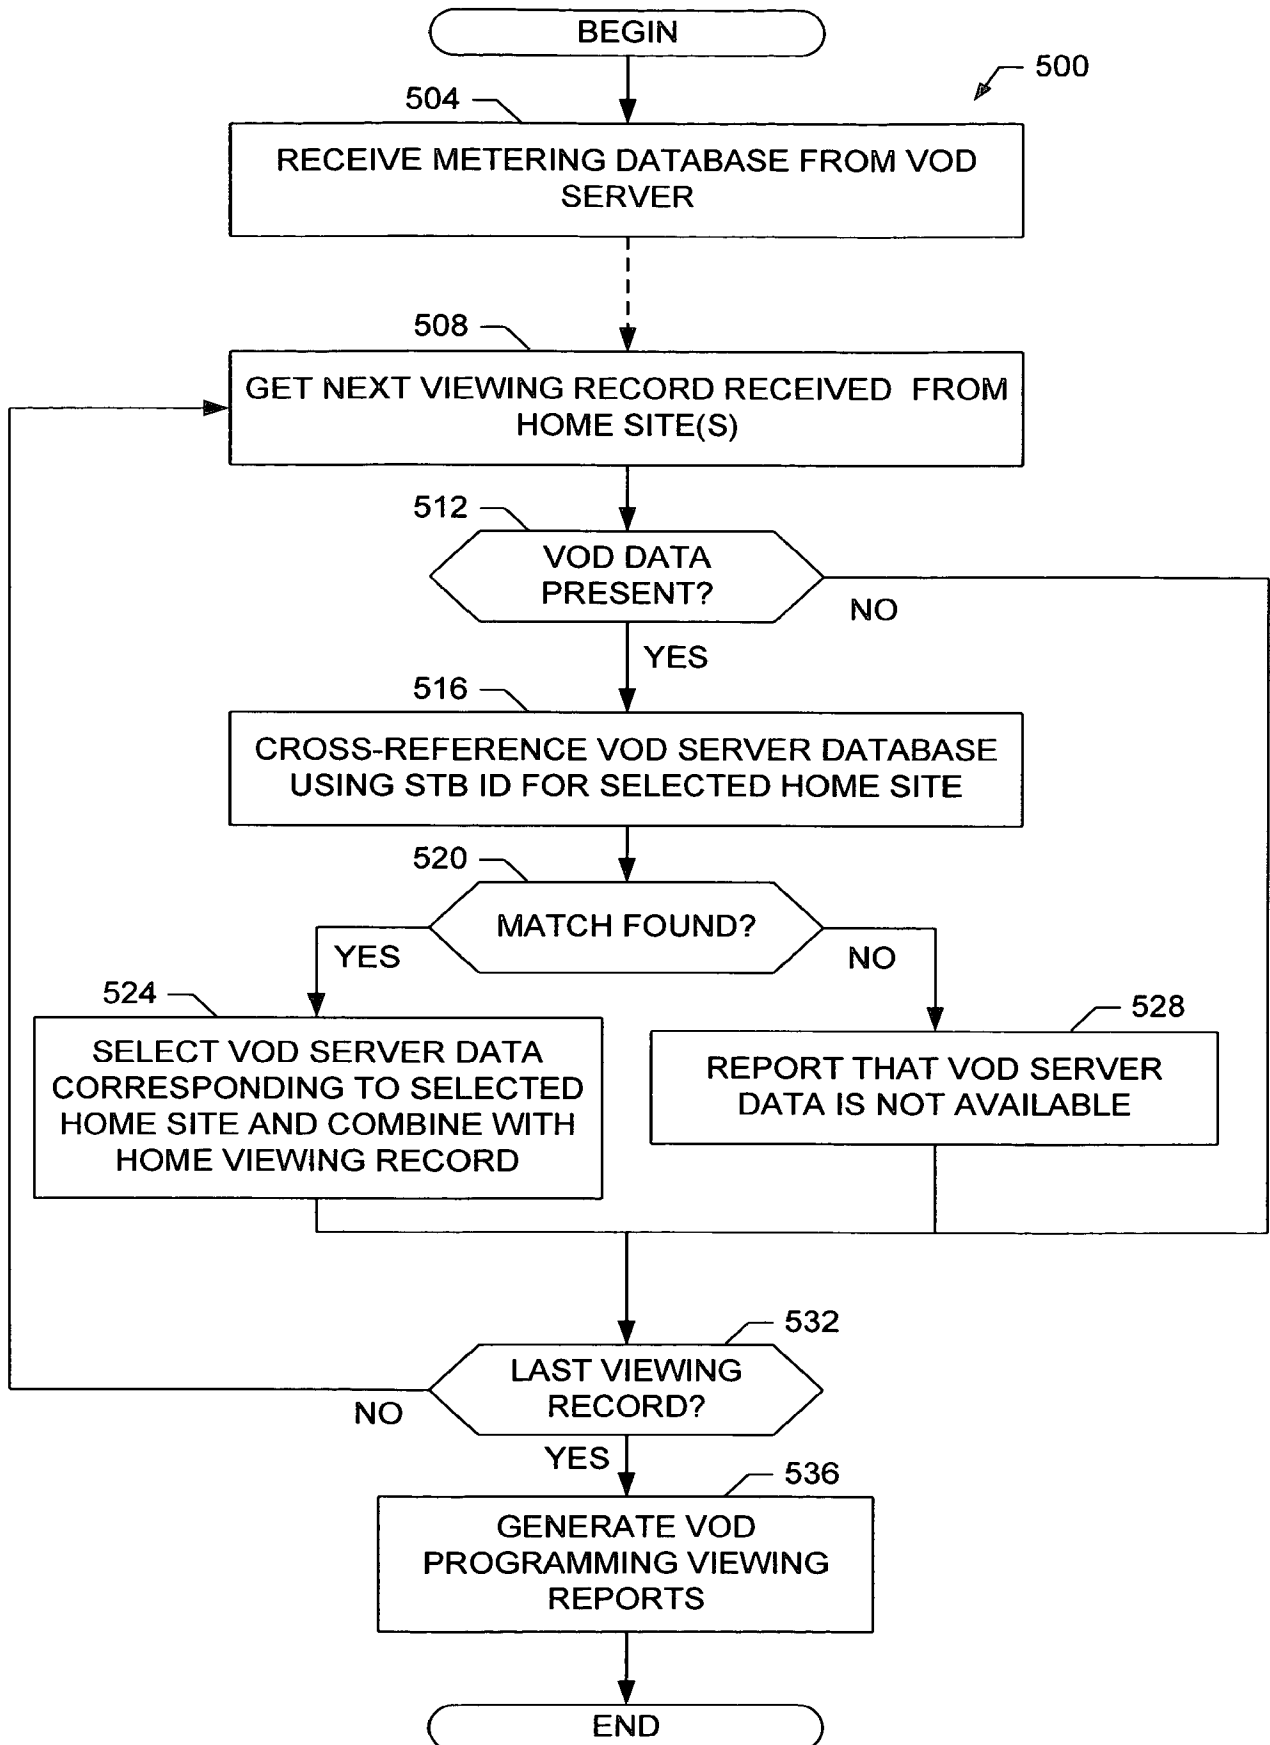


FIG. 5

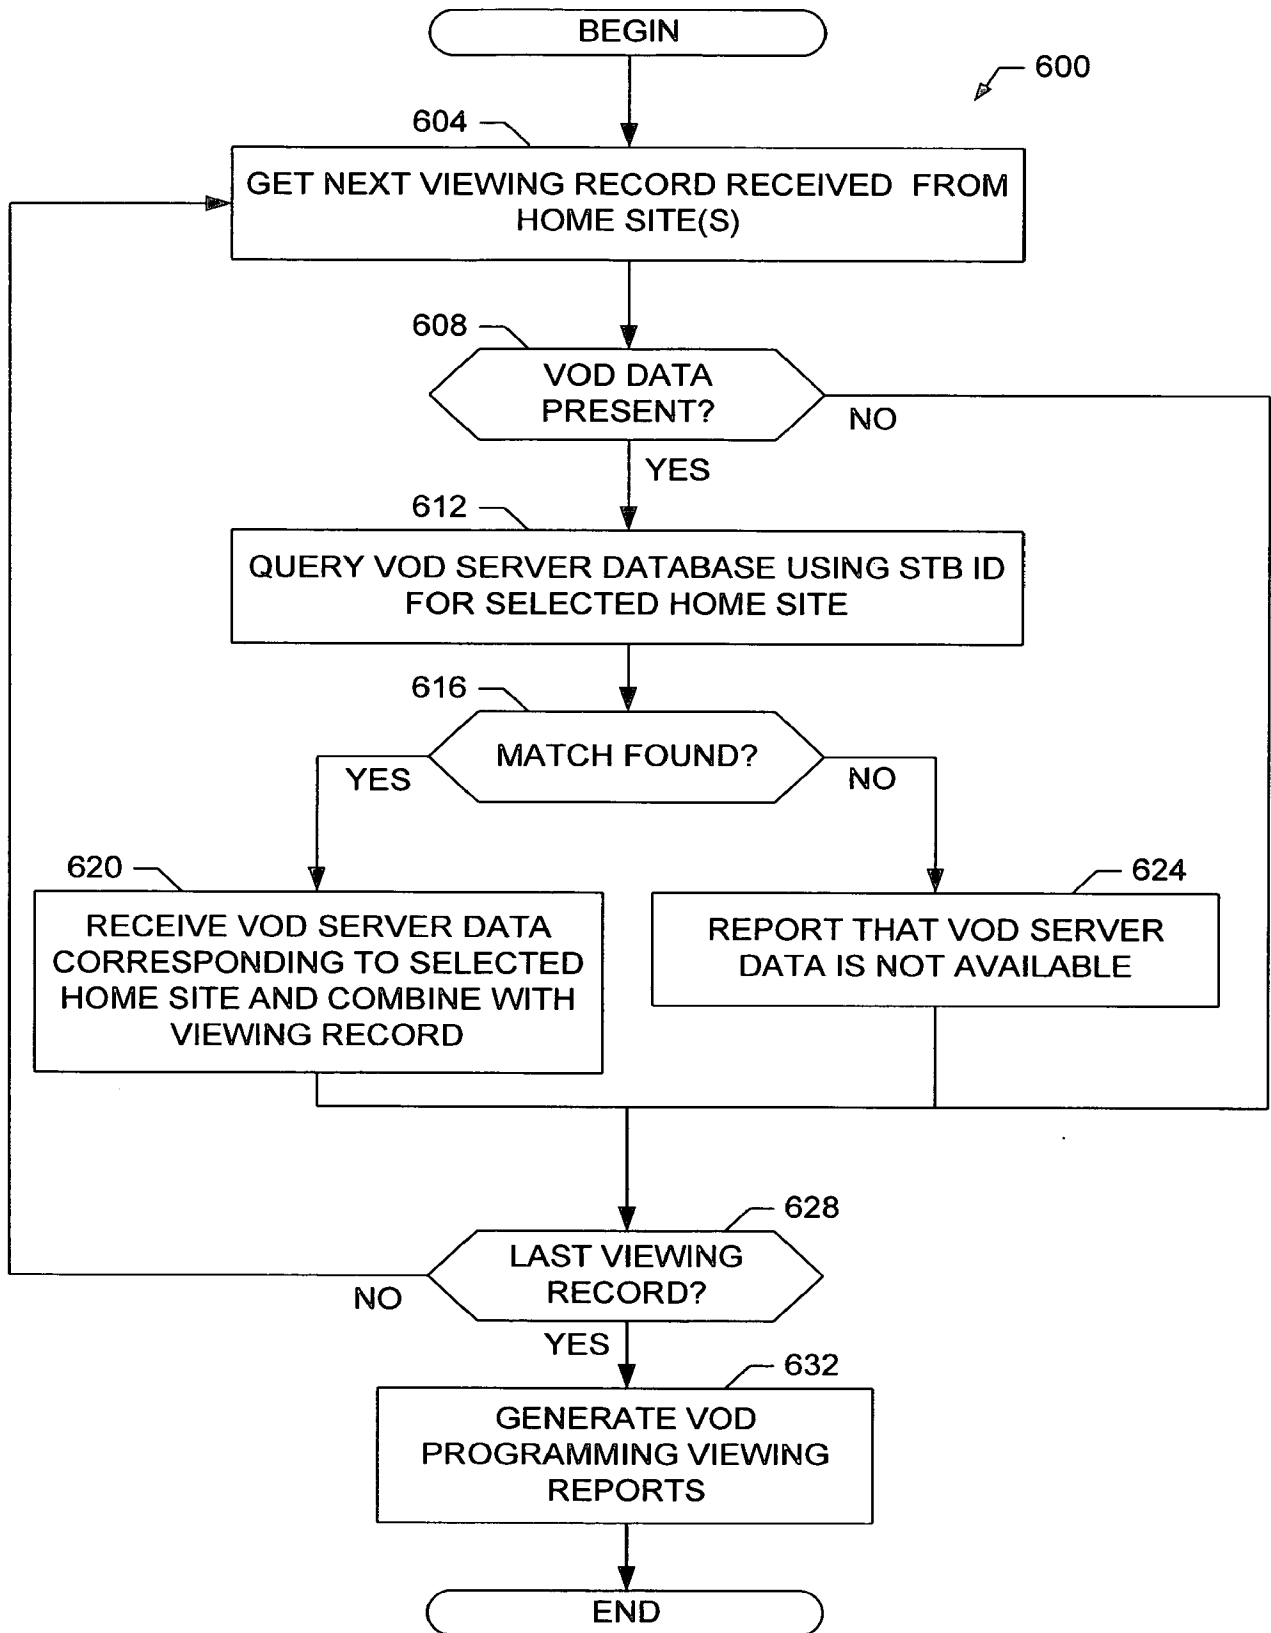


FIG. 6

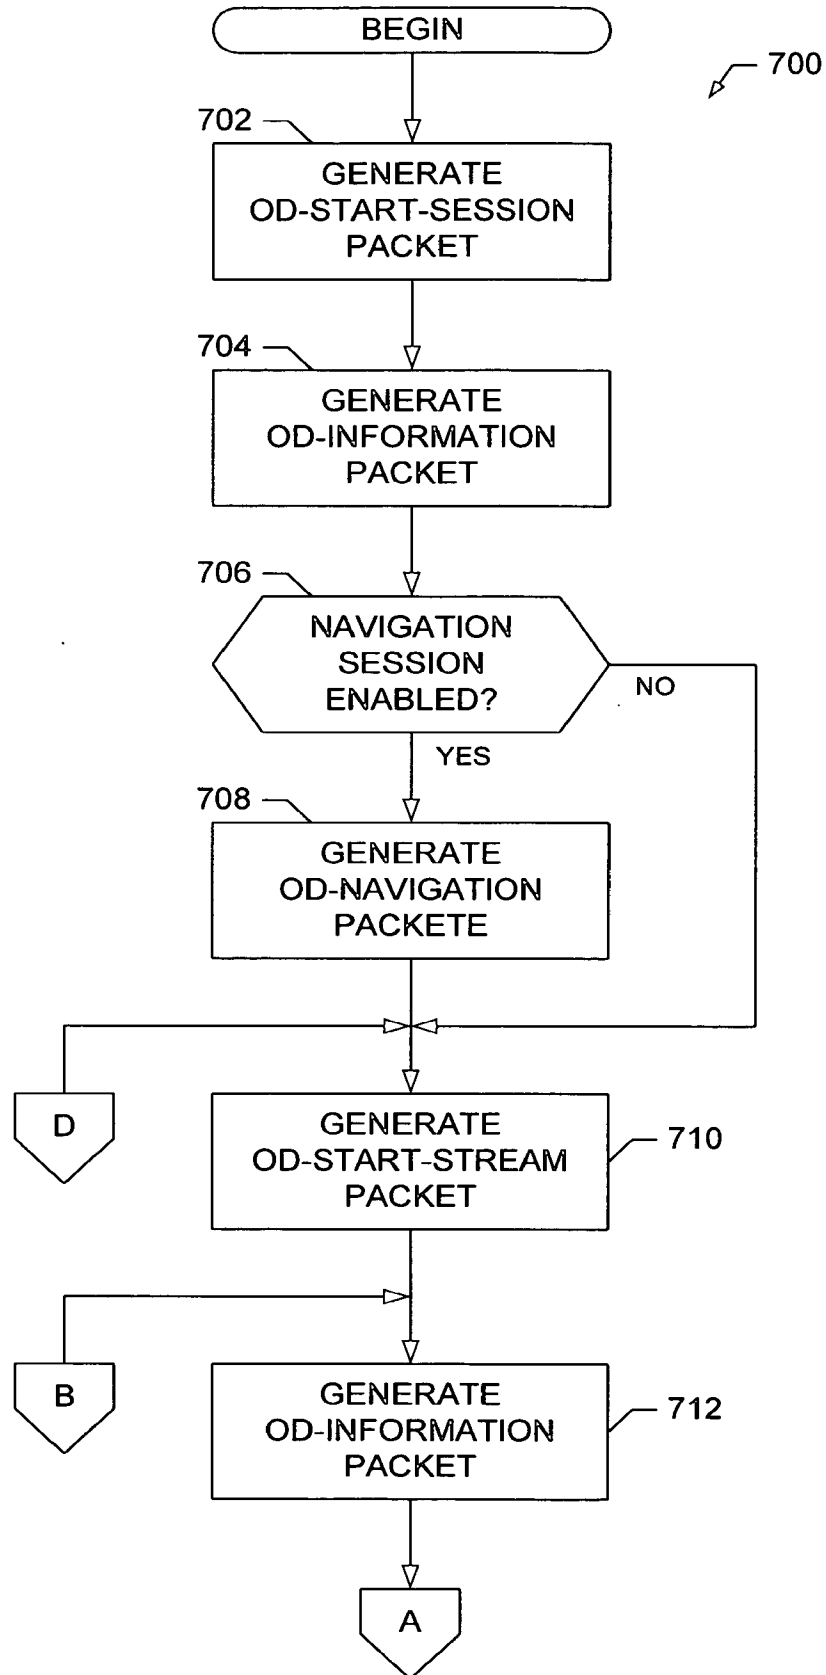


FIG. 7A

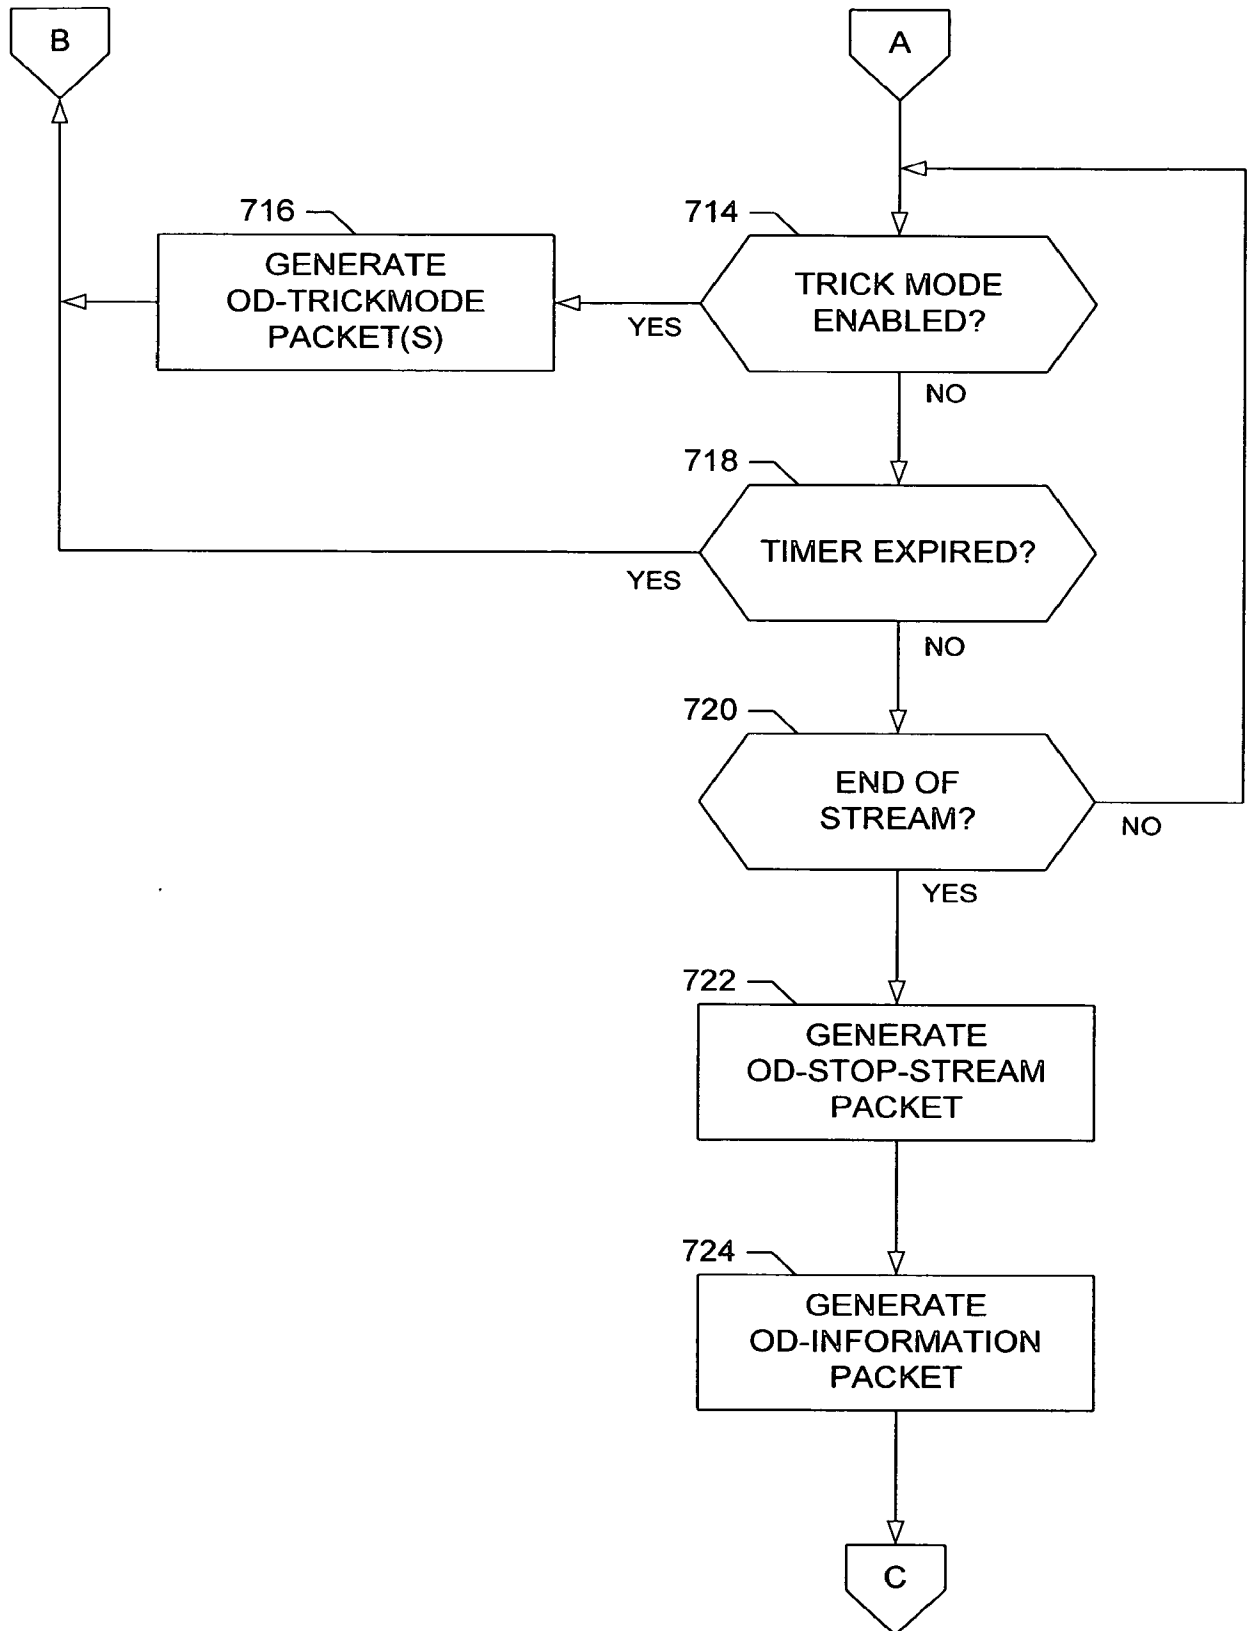


FIG. 7B

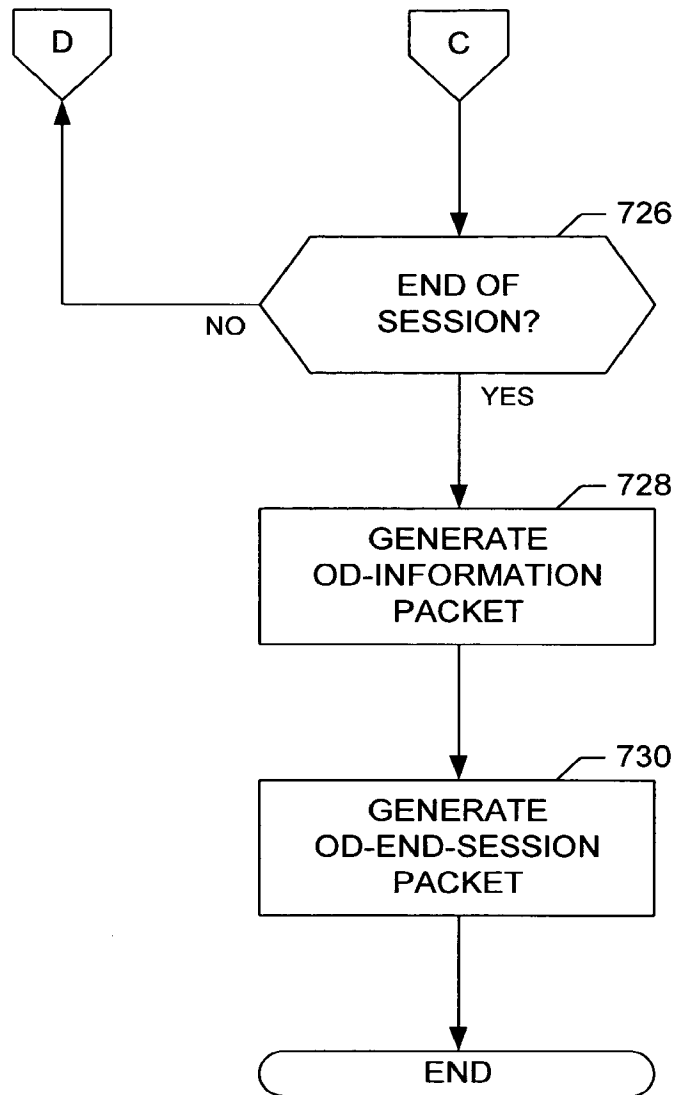


FIG. 7C

OD-START-SESSION:

| Field | Description | Format | Example |
|----------------|---|-----------------------------|----------------------------|
| Set top box ID | A unique identifier for the set top box that initiated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when On-Demand session | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |

FIG. 8A

OD-END-SESSION:

| Field | Description | Format | Example |
|----------------|--|-----------------------------|----------------------------|
| Set top box ID | A unique identifier for the set top box that terminated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when On-Demand session ended in GMT. | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |

FIG. 8B

OD-INFORMATION:

| Field | Description | Format | Example |
|----------------------|--|----------------------------------|----------------------------|
| Set top box ID | A unique identifier for the set top box that terminated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when OD-Information data was created in GMT. | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |
| Bitrate | The overall bit rate for the session | Unsigned integer | 2500000 |
| Connection Type | The type of connection between the On-Demand system and the set top box. | 1 – UDP 2 – TCP 99 – Other | 2 |
| Stream errors | The number of stream errors that have occurred since the start of the current session. | Unsigned Integer | 1 |
| Communication errors | The number of communication errors that have occurred since the start of the current session. | Unsigned Integer | 2 |
| System errors | The number of system errors that have occurred since the start of the current session. | Unsigned Integer | 3 |
| Channel number | The channel number (major and minor) that the On-Demand content is being sent on. | Unsigned Integer | 525-1 |

FIG. 8C

OD-START-STREAM:

| Field | Description | Format | Example |
|---------------------|--|---|----------------------------|
| Set top box ID | A unique identifier for the set top box that terminated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when On-Demand session started in GMT. | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |
| Stream ID | A unique identifier created by the On-Demand system that identifies the stream. | Variable-length string | 9876543210 |
| Program/Asset ID | A unique identifier assigned by the On-Demand system that indicates the program, movie or other asset within the On-Demand system. | Variable-length string | ABC123 |
| Program/Asset Title | The title of the program or asset. | Variable-length string | Today Show |
| Program/Asset Type | The type of program or asset being played out by the On-Demand system. | 1 – MOD (Movies on demand) 2 – FVOD (Free video on demand) 3 – PPV (Pay per view event) 4 – AD (Streamed advertisement) 5 – LAD (Long form streamed ad) 6 – TAD (Targeted advertisement) 99 – Other | 2 |
| Station/Studio ID | A unique identifier assigned by the On-Demand system that indicates the originating station, studio, etc. within the On-Demand system. | Variable-length string | DEF456 |
| Station/Studio Name | The name of the station or studio. | Variable-length string | WNBC |
| Genre | The rating for this program/asset as defined by the MPAA. | Variable-length string | TalkShow |
| MPA Rating | The MPA rating for the program or asset being played out by the On-Demand system. | Variable-length string | TVPG |

FIG. 8D

OD-STOP-STREAM:

| Field | Description | Format | Example |
|----------------|--|-----------------------------|----------------------------|
| Set top box ID | A unique identifier for the set top box that terminated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when a stream has stopped being delivered to a set top box in GMT. | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |
| Stream ID | A unique identifier created by the On-Demand system that identifies the stream. | Variable-length string | 9876543210 |

FIG. 8E

OD-NAVIGATION:

| Field | Description | Format | Example |
|-----------------|--|--|----------------------------|
| Set top box ID | A unique identifier for the set top box that terminated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when navigation vent occurred in GMT. | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |
| Navigation Code | A code that signifies the usage of the navigation system. | 1 – Select/OK 2 – Up arrow 3 – Down arrow 4 – Left arrow 5 – Right arrow 99 – Other | 1 |

FIG. 8F

OD-TRICKMODE:

| Field | Description | Format | Example |
|------------------|--|---|----------------------------|
| Set top box ID | A unique identifier for the set top box that terminated the On-Demand session. The recommended set top ID is the MAC address for the device. | Variable length string | 01:02:03:04:05:06 |
| Session ID | A unique identifier established between the On-Demand system and the set top box. | Variable-length string | 0123456789 |
| Timestamp | The time/date when a trick occurred during an On-Demand session in GMT. | MM/DD/YYYY HH:MM: SS.MMM | 01/23/2003 20:55:20.123 |
| Stream ID | A unique identifier created by the On-Demand system that identifies the stream. | Variable-length string | 9876543210 |
| Trick | A code that indicates which trick has occurred. | 1 – Fast Forward 2 – Rewind 3 – Pause 4 – Play 5 – Resume | 1 |
| Offset Timestamp | The offset timestamp is the time the trick occurred relative to the start of the stream. | HH:MM: SS.MMM | 01:05:15.225 |

FIG. 8G

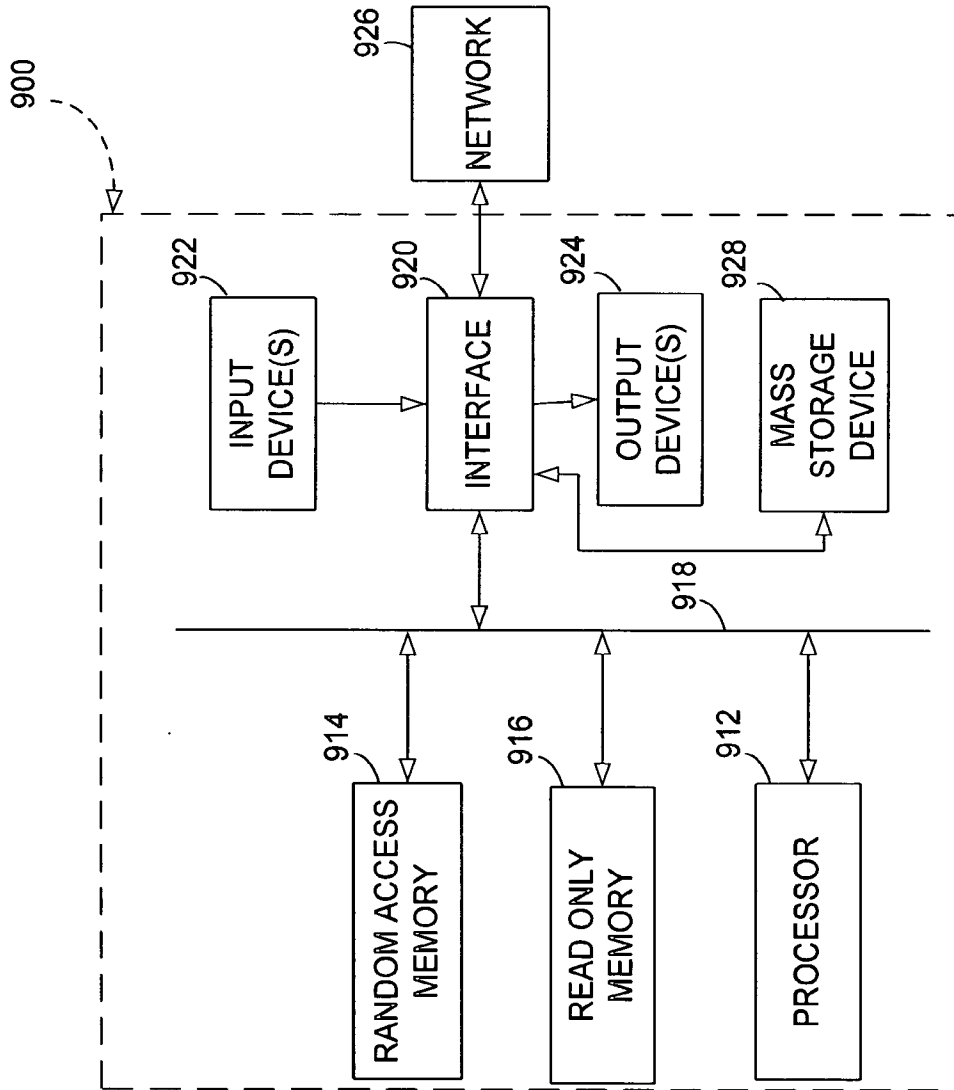


FIG. 9